

The Engenius Wireless-N Gigabit Router (ESR-9710) is a draft 802.11n compliant device that delivers up to 6x faster speeds than 802.11g while staying backward compatible with 802.11g and 802.11b devices. ESR-9710 is not only a Wireless Access Point, which lets you connect to the network without wires. There's also a built-in 4-port full-duplex 10/100/1000 Gigabit Switch to connect your wired-Ethernet devices together. The Router function ties it all together and lets your whole network shares a high-speed cable or DSL Internet connection.

The Access Point built into the Router uses advanced MIMO (Multi-Input, Multi-Output) technology to transmit multiple streams of data in a single wireless channel. The robust signal travels farther, maintaining wireless connections up to 3 times farther than standard 802.11g, eliminates dead spots and extends network range. To protect the data and privacy, the Router can encode all wireless transmissions with 64/128-bit encryption. It can serve as your network's DHCP Server, has a powerful SPI firewall to protect your PCs against intruders and most known Internet attacks, and supports VPN pass-through. The router also provide easy configuration with the web browser-based configuration utility.



The incredible speed and QoS function of 802.11n (draft2.0) gigabit router is ideal for media-centric applications like streaming video, gaming, and VoIP telephony. It is adopt to run multiple media-intense data streams through the network at the same time, with no degradation in performance.

| Features | Benefits |
|---|---|
| High Speed Data Rate Up to 300Mbps | Capable of handling heavy data payloads such as MPEG video streaming |
| IEEE 802.11n draft Compliant and backward compatible with 802.11b/g | Fully interoperable with IEEE 802.11b/g/n devices |
| Four built-in 10/100/1000Mbps Gigabit Switch Ports (Auto-Crossover) | Scalability, able to extend your network |
| Supports DNS/ DDNS | Lets users assign a fixed host and domain name to a dynamic Internet IP address. |
| Supports NAT (Network Address Translation)/NAPT | Shares single Internet account and provides a type of firewall by hiding internal IP addresses for keeping hacker out |
| Hide SSID | Avoids unallowable users sharing bandwidth, increases efficiency of the network |
| Firewall supports Virtual Server Mapping, DMZ, IP Filter, ICMP Blocking, SPI | Avoids the attacks of Hackers or Viruses from Internet |
| Support 802.1x authenticator, 802.11i (WPA/WPA2, AES), VPN pass-thru mechanisms | Provide mutual authentication (Client and dynamic encryption keys to enhance security |

2.4 GHz

802.11 n

300 Mbps

| Features | Benefits |
|------------------------------------|--|
| WDS (Wireless Distribution System) | Make wireless AP and Bridge mode simultaneously as a wireless repeater |
| Universal Plug and Play (UPnP™) | Works with most Internet gaming and instant messaging applications for automatic Internet access |
| Filter Scheduling | The filter can be scheduled by days, hours or minutes for easy management |
| Real time alert | The detection of a list for Hacker log-in information |
| Web configuration | Helps administrators to remotely configure or manage the Router via Telnet/Web-browser |

*** Subject to change without prior notice

Technical Specifications


● Hardware Specifications

➤ Hardware Summary

| | |
|--------------------|--|
| MCU | Ubicom IP5K, 275MHz |
| Memory | 16MB DDR |
| Flash | 4MB |
| Expansion Slots | Mini-PCI Slots |
| Physical Interface | <ul style="list-style-type: none"> ● WAN: One 10/100/1000 Gigabit RJ-45 ● LAN: Four 10/100/1000 Gigabit RJ-45 ● Reset Button (1 second for Reboot, 5 second for Reset to Factory Default) ● Power Jack ● JTAG (for debug only) |
| LEDs Status | <ul style="list-style-type: none"> ● Power/ Status ● WAN (Internet connection) ● LAN1~LAN4 (10/100/1000Mbps) ● WLAN (Wireless Connection) |
| Power Requirements | <ul style="list-style-type: none"> ● Power Supply: 90 to 240 VDC ± 10% (depends on different countries) ● Device: 12 V/ 1.25A |

➤ Front Panel (LED status)


| | |
|--------------|--|
| WAN | 1 (Link->green on, traffic->blink) |
| LAN | 4 (Link->green on, traffic->blink) |
| WLAN | 1 (Link->green on, traffic->blink) |
| Power/Status | 1 (On->green Test/reset default->blink) |

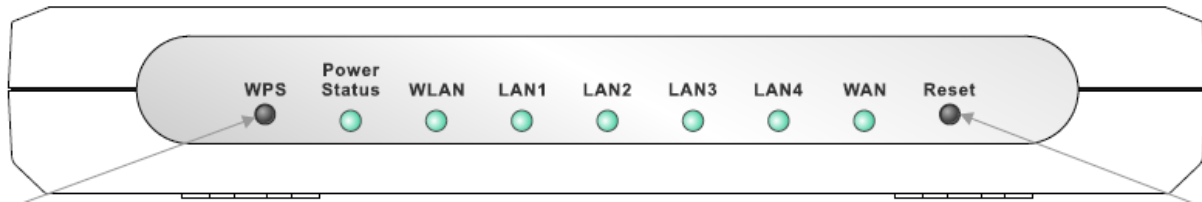

Button

Button

➤ Rear Panel (Interface)

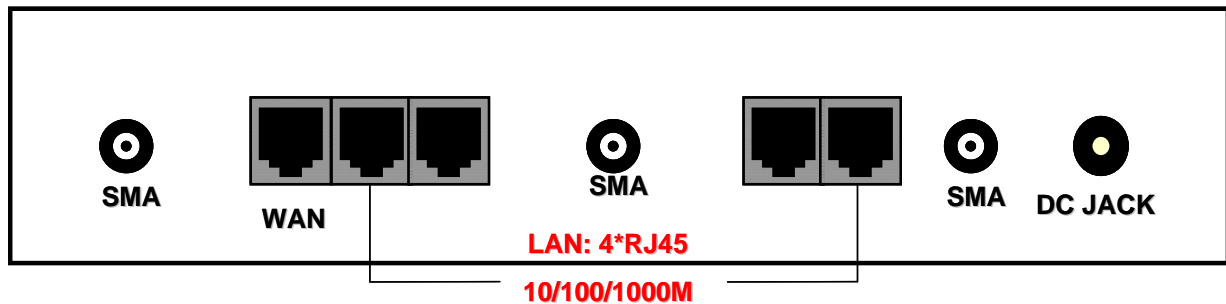

➤ Radio Specifications

| | |
|-------------------------------|--|
| Frequency Band | 2.400~2.484 GHz |
| Media Access Protocol | Carrier sense multiple access with collision avoidance (CSMA/CA) |
| Modulation Technology | <ul style="list-style-type: none"> • OFDM: BPSK, QPSK, 16-QAM, 64-QAM • DBPSK, DQPSK, CCK |
| Operating Channels | 11 for North America, 14 for Japan, 13 for Europe |
| Receive Sensitivity (Typical) | <ul style="list-style-type: none"> • 2.412~2.472G(IEEE802.11b) (1Rx) <ul style="list-style-type: none"> -93dBm @ 1Mbps -91dBm @ 11Mbps • 2.412~2.472G(IEEE802.11g) (2Rx) <ul style="list-style-type: none"> -92dBm @ 6Mbps -79dBm @ 54Mbps • 2.412~2.472G(IEEE802.11N) (2Rx) <ul style="list-style-type: none"> -90 dBm MCS 8 -70 dBm MCS 15 |
| Available transmit power | <ul style="list-style-type: none"> • 2.412~2.472G(IEEE802.11b) <ul style="list-style-type: none"> 19dBm @1~11Mbps • 2.412~2.472G(IEEE802.11g) <ul style="list-style-type: none"> 19 dBm @6Mbps 16 dBm @54Mbps • 2.412~2.472G(IEEE802.11N) <ul style="list-style-type: none"> 20 dBm MCS 8 16 dBm MCS 15 |
| Antenna Gain | <p>Peak Gain = 2 dBi</p> <p>Average Gain = 1.08 dBi (@ 2.45GHz, H-Plan)</p> |

● Software Features

➤ Router and Gateway

| | |
|----------------|---|
| Topology | Infrastructure |
| Operation Mode | AP/ Router/ WDS Bridge |
| LAN | <ul style="list-style-type: none"> ● DHCP Server ● Static IP ● DNS ● UPNP |
| WAN | <ul style="list-style-type: none"> ● Static IP ● DHCP Client ● PPPoE ● PPTP ● Clone MAC ● DNS Relay ● DDNS-8 Verified Services |
| Router | <ul style="list-style-type: none"> ● NAT/ NAPT ● Static Routing- RIPv2 ● Dynamic Route ● Virtual server mapping ● IP address mapping ● Port Forwarding ● Port Triggering ● MAC address Filtering ● ALG(Application Layer Gateway) support (RTP/RTSP, AOL, FTP, ICMP, WMP/MMS, NetMeeting, SIP) |
| QoS | <ul style="list-style-type: none"> ● WMM ● Intelligent Stream Handling/Wireless Intelligent Stream Handling <ul style="list-style-type: none"> ➤ Automatic Traffic Classification & Prioritization ➤ Dynamic Traffic Shaping & Packet Fragmentation ➤ Automatic Configuration |

2.4 GHz

802.11 n

300 Mbps

| | |
|----------|--|
| Firewall | <ul style="list-style-type: none"> • Blocking Ping • ICMP Blocking • SPI (Stateful Packet Inspection) • Rule Based (IP Address Ranges, Port Ranges & Schedule) • DMZ (Demilitarized Zone) Host • Policy Based Parental Controls <ul style="list-style-type: none"> ➢ Time Based Internet Access ➢ Port Range / Service Filtering ➢ Internet Domain Restriction ➢ Dynamic URL Filtering (OEM subscription service) |
| VPN | VPN pass-through (PPTP, L2TP, IPSEC) |
| Wireless | <ul style="list-style-type: none"> • 64/128 bit WEP Encryption • WPA Personal (WPA-PSK using TKIP or AES) • WPA Enterprise (WPA-EAP using TKIP) • 802.1x Authenticator • Hide SSID in beacons • Wi-Fi Protection Setup (WPS) • Auto Channel Selection |

➢ Management

| | |
|-----------------------|--|
| Configuration | Web-based configuration (HTTP) |
| Firmware Upgrade | Upgrade firmware via web-browser |
| Administrator Setting | <ul style="list-style-type: none"> • Administrator password change • Idle time out |
| Reset Setting | <ul style="list-style-type: none"> • Reboot • Reset to Factory Default |
| System monitoring | Status and Statistics, Time Zone & NTP Client, Event Log, Email Alarm |