


# Data sheet

## BenQ SL550

### Large Format Display

- Full HD 1920 x 1080
- Slim Design
- Brightness 450 cd/m<sup>2</sup>
- Android 4.3 OS system
- DP und DVI Daisy Chain

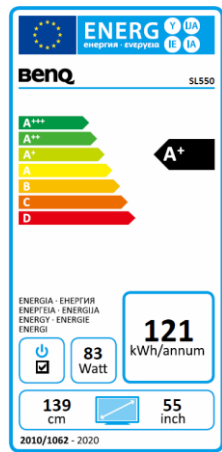

Modell : SL550  
Art. Nr. / EAN Code : 9H.F0CPT.RA2 / 471 8755 06503 3


<b>Panel</b>	Type : 139.7 cm / 55" Wide TFT IPS-Technology Panel Native Resolution : 1920 x 1080 Full HD 1080p / 16:9 Panel / Pixelpitch : 8 Bit / 0.630 mm Max. colors : 16.7 Mio. Backlight : Edge LED Viewing Angle H / V : 178° / 178° contrast (static) : 1100:1 Brightness : 450 cd/m <sup>2</sup> Response time : 12 ms
<b>Input- / Output</b>	input : Power AC, AC power switch, HDMI 2x, DVI-I in, DP in, RS232 in, RJ45 in, USB (Typ A), micro USB, IR in output : Audio Line out (3.5 mm), external Speaker out, RS232 out, DP out, IR out
<b>Software</b>	Multiple Display Control (MDA) : Supported OS: WinXP 32 bit, WinVista 32/64 bit SP2, Windows 7 32/64 bit  OSD control on backside : On/Off - Switch, 6 OSD buttons , Standby button Features : Image Setting, Source / Volume Control, DP und DVI Daisy Chain, RS232 Control Daisy Chain, ID Setting, Sharpness Enhancement, Multiple Display Administrator
<b>Extra</b>	Internal Speakers : 10W x 2 Mounting : 400 x 400 mm Operating hour per day : 24/7 Mounting direction : Landscape / Portrait Storage : 8 GB
<b>Energy</b>	Power supply : external Voltage for operation : 100 ~ 240 VAC ; 50 / 60 Hz Power consumption (max.) : < 121 W (sleep mode) : < 0,5 W
<b>Certification Environment</b>	Safety : CE Operation : + 0 ~ +40°C ; 10 ~ 80% air humidity Storage : -20 ~ +60°C ; 10 ~ 90% air humidity
<b>Characteristic</b>	Weight net : 18 kg Housing color : black Bezel width : 9.5 mm (left / right / top) ; 15.6 mm (bottom) Dimension (W x H x D) : 1233.1 x 710 x 45.5 mm Standard Accessories : Quick Start Guide, Netz- / HDMI- / VGA- cable, manual (electronic), remote

Warranty terms : 3 years on-site exchange



# Data sheet

## Ein- und Ausgänge

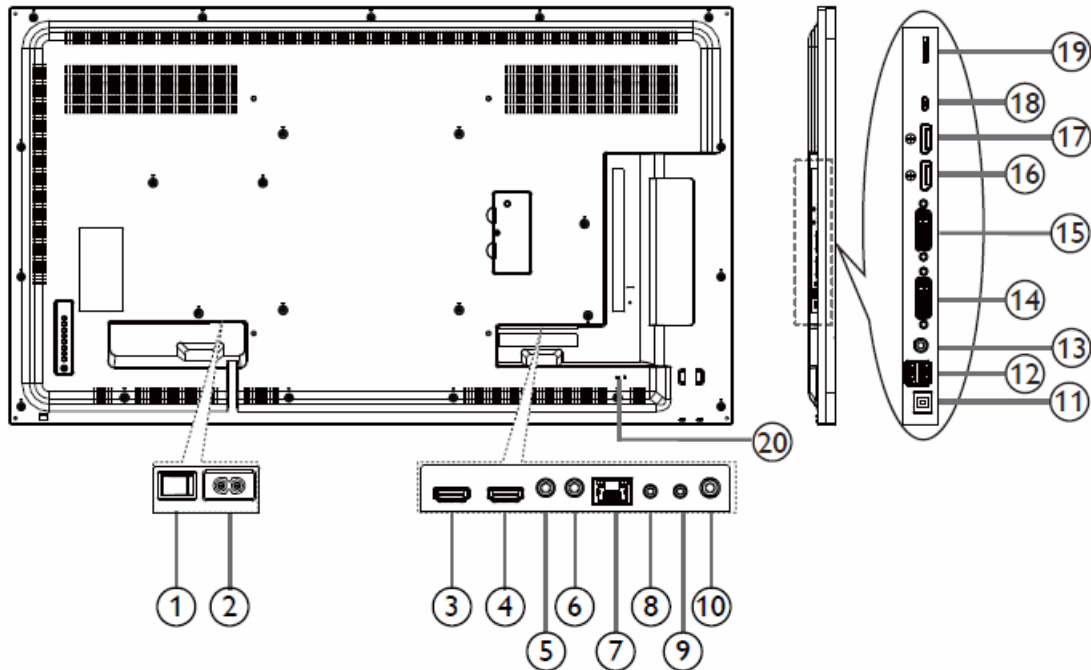

① **AC SWITCH**

Switch the main power on/off.

② **AC IN**

AC power input from the wall outlet.

③ **HDMI1 IN** / ④ **HDMI2 IN**

HDMI video/audio input.

⑤ **IR IN** / ⑥ **IR OUT**

IR signal input / output for the loop-through function.

⑦ **RJ-45**

LAN control function for the use of remote control signal from control center.

⑧ **RS232 IN** / ⑨ **RS232 OUT**

RS232 network input / output for the loop-through function.

⑩ **Audio OUT**

Audio output to external AV device.

⑪ **USB PORT B**

Touch connector to PC.

⑫ **USB PORT A**



⑬ **PC LINE IN**

Audio input for VGA source (3.5mm stereo phone).

⑭ **DVI IN**

DVI-I video input.

⑮ **DVI OUT**

DVI or VGA video output.

⑯ **DisplayPort IN** / ⑰ **DisplayPort OUT**

DisplayPort video input / output.

⑱ **MICRO USB**

Connect your USB storage device.

⑲ **MICRO SD CARD**


Connect your MICRO SD CARD.

⑳ **SECURITY LOCK**

Used for security and theft prevention.

# Data sheet

## Befestigung:

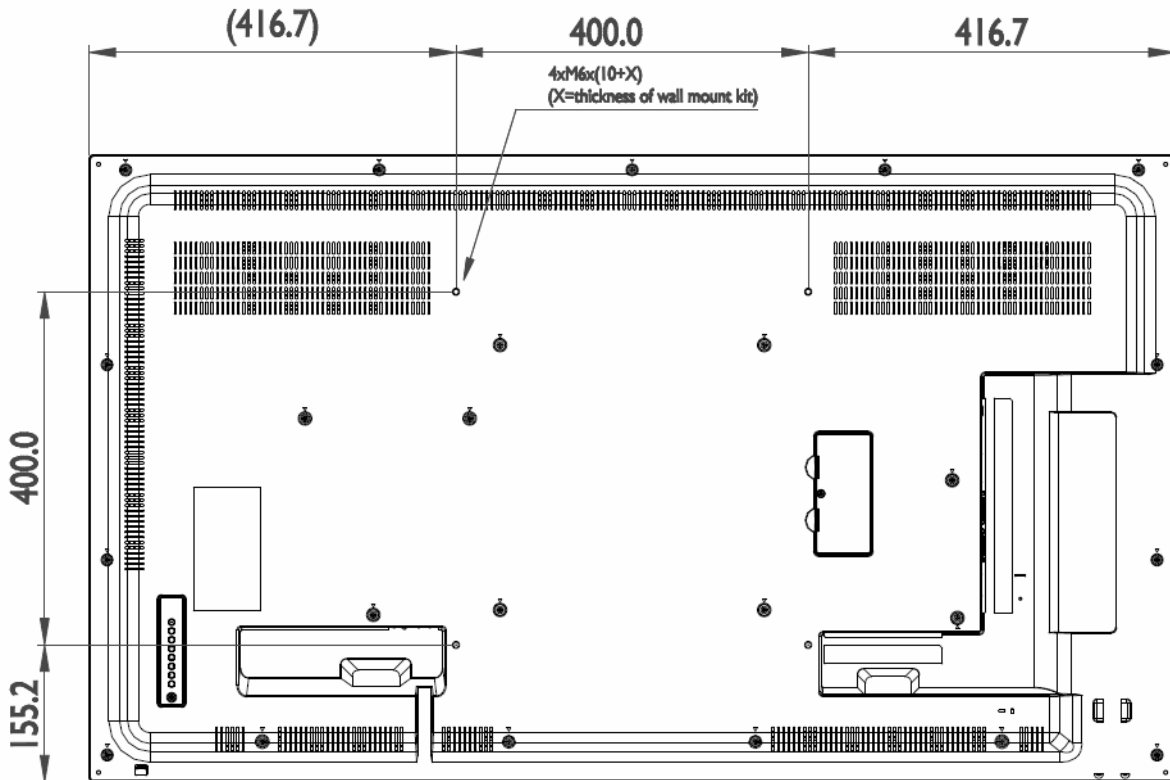

## Abmessungen:

