

Built to last

Sturdy industrial-strength designed for continuous high-traffic operation.



Stay Connected

With two SIM slots and an eSIM, the MAX Adapter always has a way to connect.

Instant Unbreakable VPN

Compatible with SpeedFusion Cloud, enabling an unbreakable VPN to be built to any SpeedFusion-enabled device.

Compatible with 5G

MAX Adapter now offers a 5G compatible device option. Bringing 5G connectivity to your devices.





Portable


The light and sleek enclosure offers portability in the palm of your hands.





Connect with



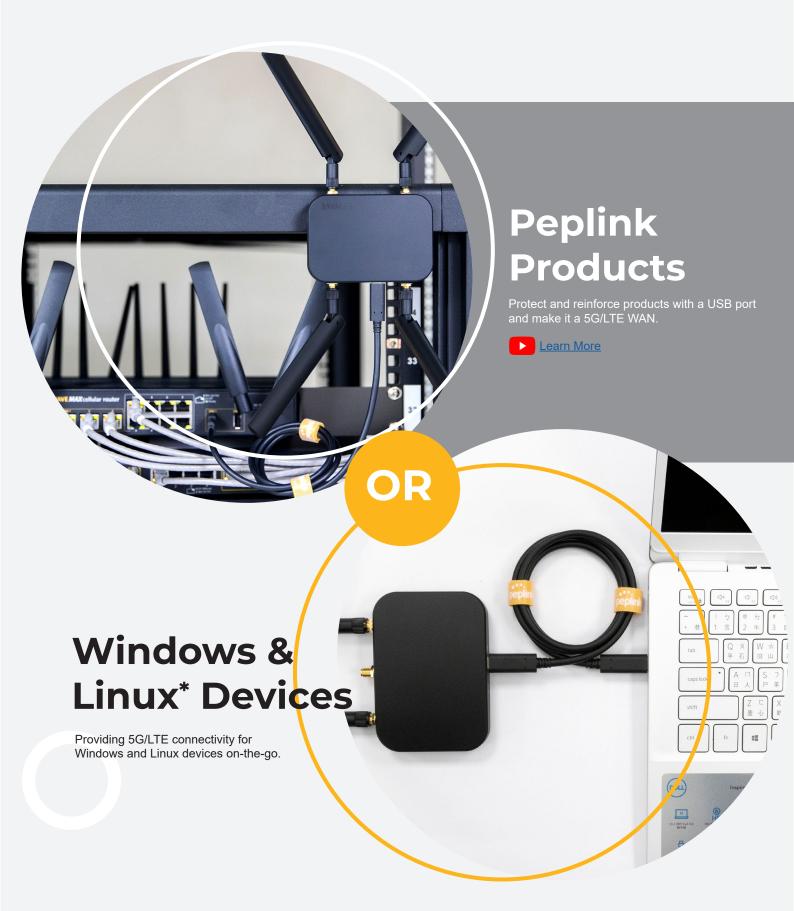

^{*} For users on the Linux, please refer to our MAX Adapter user manual to set up.







100 x 71 x 15 mm



Specifications

Cellular WAN InterfacesSingle 5G ModemWeight120g

Redundant SIM Slot Yes **Operating Temperature** $32^{\circ} - 104^{\circ}\text{F} / 0^{\circ} - 40^{\circ}\text{C}$

Downlink/Uplink5G: 4 Gbps / 700 MbpsHumidity15% – 95% (non-condensing)DatarateLTE CAT-20: 2 Gbps / 150 Mbps

Antenna Connectors 4x SMA Cellular 4x SMA Cellular 1-Year Limited Warranty

Power Input 5V USB-C Certifications FCC, CE, IC

Power Consumption Package Content MAX Adapter, 4x LTE/5G LTE Antennas (ACW-234),

USB-C power cable

3.9 x 2.8 x 0.6 inches /

Ordering information

Dimensions

Product Code	Carrier / Category	5G Bands	LTE Bands
MAX-ADP-5GH-T	Global / 5G	5G (NSA) Sub 6Ghz: n1, n2, n3, n5, n28, n41, n66, n71, n77, n78, n79 5G (SA) Sub 6Ghz:	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32,B34, B38, B39, B40, B41, B42, B46, B48, B66, B71
		, , , ,	



MAX Adapter





Specifications

Cellular WAN Interfaces	Single LTE Modem	Weight	120g
Redundant SIM Slot	Yes	Operating Temperature	32° – 104°F / 0° – 40°C
Downlink/Uplink Datarate	CAT-12: 600 Mbps / 150 Mbps CAT-6: 300Mbps / 50Mbps	Humidity	15% – 95% (non-condensing)
Datarate	0/1-0. 000Mbp3 / 00Mbp3	Warranty	1-Year Limited Warranty
Antenna Connectors	2x SMA Cellular, 1x SMA GPS		
Power Input	5V USB-C	Certifications	FCC, CE, IC
Power Consumption	5W (nominal), 10W (max.)	Package Content	MAX Adapter, 4x 4G LTE Antennas (ACW-813), USB-C power cable
Dimensions	3.9 x 2.8 x 0.6 inches / 100 x 71 x 15 mm	US Carrier Certifications	Verizon, AT&T

Ordering information

Product Code	Carrier / Category	LTE Bands	3G Bands
MAX-ADP-LTEA-K-T	Global CAT-12	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19
MAX-ADP-LTEA-R-T	America CAT-12	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19
MAX-ADP-LTEA-W-T	Global CAT-6	B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8

Accessories

Product Code	Description
ACW-232	GPS Antenna

