



dreamoc™ XL3

Stand assembly guide

Version 1.0

Dreamox XL3 Basic Stand



Dreamoc XL3 Shelf Option Stand



When receiving the Dreamoc XL3 Stand



Package contents Dreamoc XL3 Basic Stand



1. 2 x Side Panels (Identical)
2. 2 x Top / Bottom Panels (Identical)
3. 1 x Power extension cord
4. 1 x Carpet
5. 32 x $\varnothing 5$, 70 mm Screws
6. User Instruction
7. 1 x 3 mm Unbrako key
8. 4 x Adjustable Feet
9. 8 x Self - adhesive felt pads
10. Black Plastic Strip
11. 4 x Shelf Support (for Dreamoc XL3 Shelf Option Stand)



Package contents Dreamoc XL3 Shelf Option Stand

1. 2 x Back-Wall parts
2. 1 x Shelf



How to assemble the Dreamoc XL3 Stand

Note: To avoid damage or scratches we recommend to assemble the stand on top of the carpet that comes with the product.

1.

When all the parts have been unboxed, place one of the Side Panels on the carpet as shown below and take out the accessories bag from within the Side Panel.



2.

Assemble the Bottom Panel with the Side Panel.

Start by placing the Bottom Panel in a 90° angle to the Side Panel and slide them together.






Use 8 x screws and the Unbrako key to fasten the 2 parts together.
TIP: If you have a power drill we recommend to use it to speed-up the workflow.




3.
Take the Power extension cord and make sure it runs inside the Side Panel.

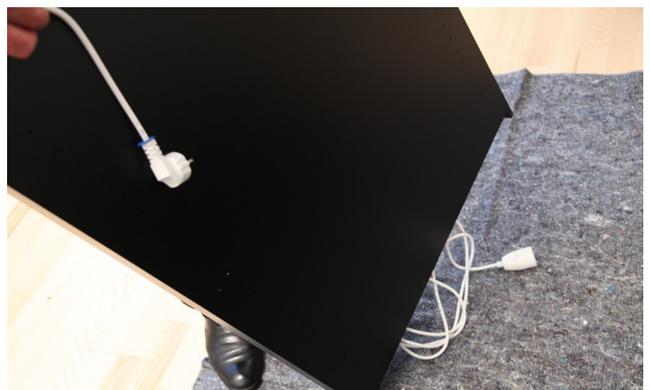



Place it on the carpet, in a 90° angle to the Bottom Panel and slide them together. Ensure that the male plug comes out the bottom, and the female plug at the top.

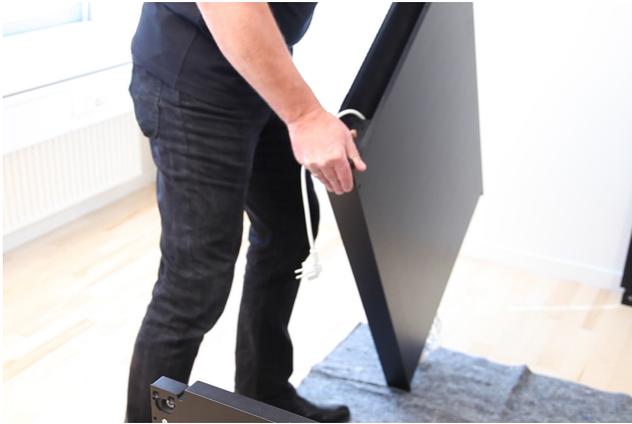


Assemble the 2 Panels with screws as described in Step 2.



4.

Mount the 4 x Adjustable feet.

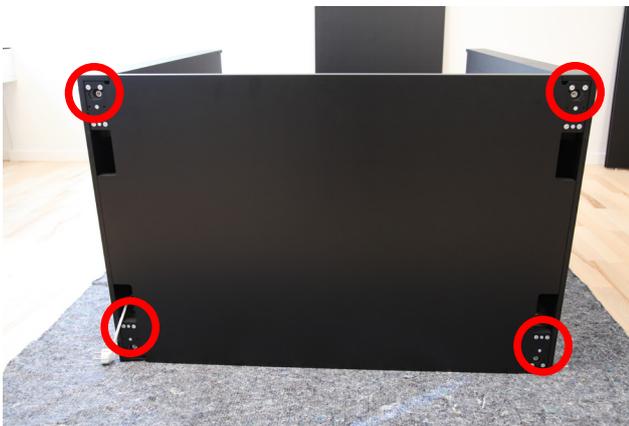

IF YOU HAVE THE SHELF OPTION, PLEASE SKIP TO STEP 7 NOW.



ONLY BASIC STAND

FOR SHELF OPTION GO TO STEP 7



5.

Assemble the Top Panel with the 2 Side panels.



6.

Turn the Dreamoc XL3 Stand, so its stands on its feet.

Secure the power extension cable to the Stand with the Black Plastic strip, to avoid it from disappearing down inside the Stand.

After you have attached it to the stand, you can safely drop the plug into the stand trough the hole.



The Basic Stand is now ready, and you can place your Dreamoc XL3 on top and connect the cable.





7.

Install the 2 x Back-Wall parts.



Each Back-Wall part has a flat side and an overlap. The overlap must face towards the center. Place the Back-Wall part as shown, and then slide the pins into the holes.



If you find it difficult to get the pins into the holes, you can attach the self-adhesive felt pads on the back side of the Back-Wall part to get the perfect height. Remove them again after assembly.



Insert the second Back-Wall part, while making sure the overlaps match, and both parts are aligned.

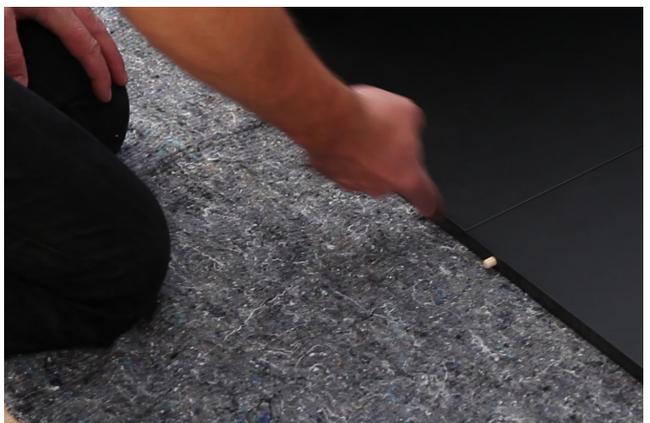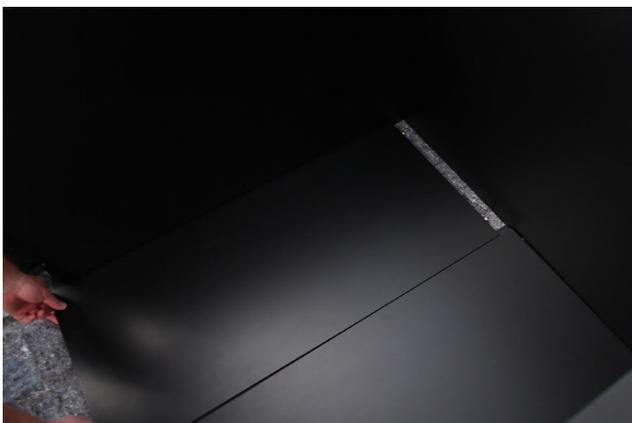




8.

Assemble the Top Panel with the 2 Side Panels and tighten it with screws.



9.

Mount the 4 Shelf Supports (shelf hangers) in the desired height. Return the Dreamoc XL3 stand to its feet, and place the shelf securely on top of the Supports.

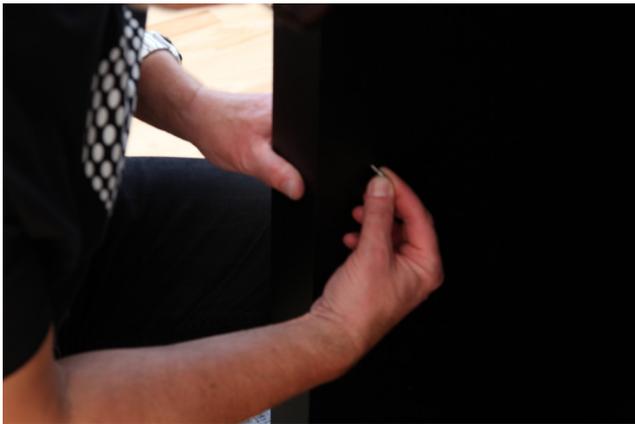



10.

Secure the power extension cable to the Stand with the Black Plastic strip, to avoid it from disappearing down inside the Stand.

After you have attached it to the stand, you can safely drop the plug into the stand trough the hole.



Your Stand is now ready, and you can place your Dreamoc XL3 on top and connect the cable.



Magic Matters



For further information and pricing please contact Realfiction
Phone: +45 70 20 64 90
email: contact@realfiction.com

Realfiction and Dreamoc are registered trademarks owned by Realfiction ApS. Other marks may be mentioned here in that belong to other companies. © 2016 Realfiction ApS. All rights reserved.

Realfiction ApS | Øster Alle 42, 7th floor | DK-2100 Copenhagen Ø Denmark | Phone: +45 70 20 64 90