




POLYCOM®

User Guide

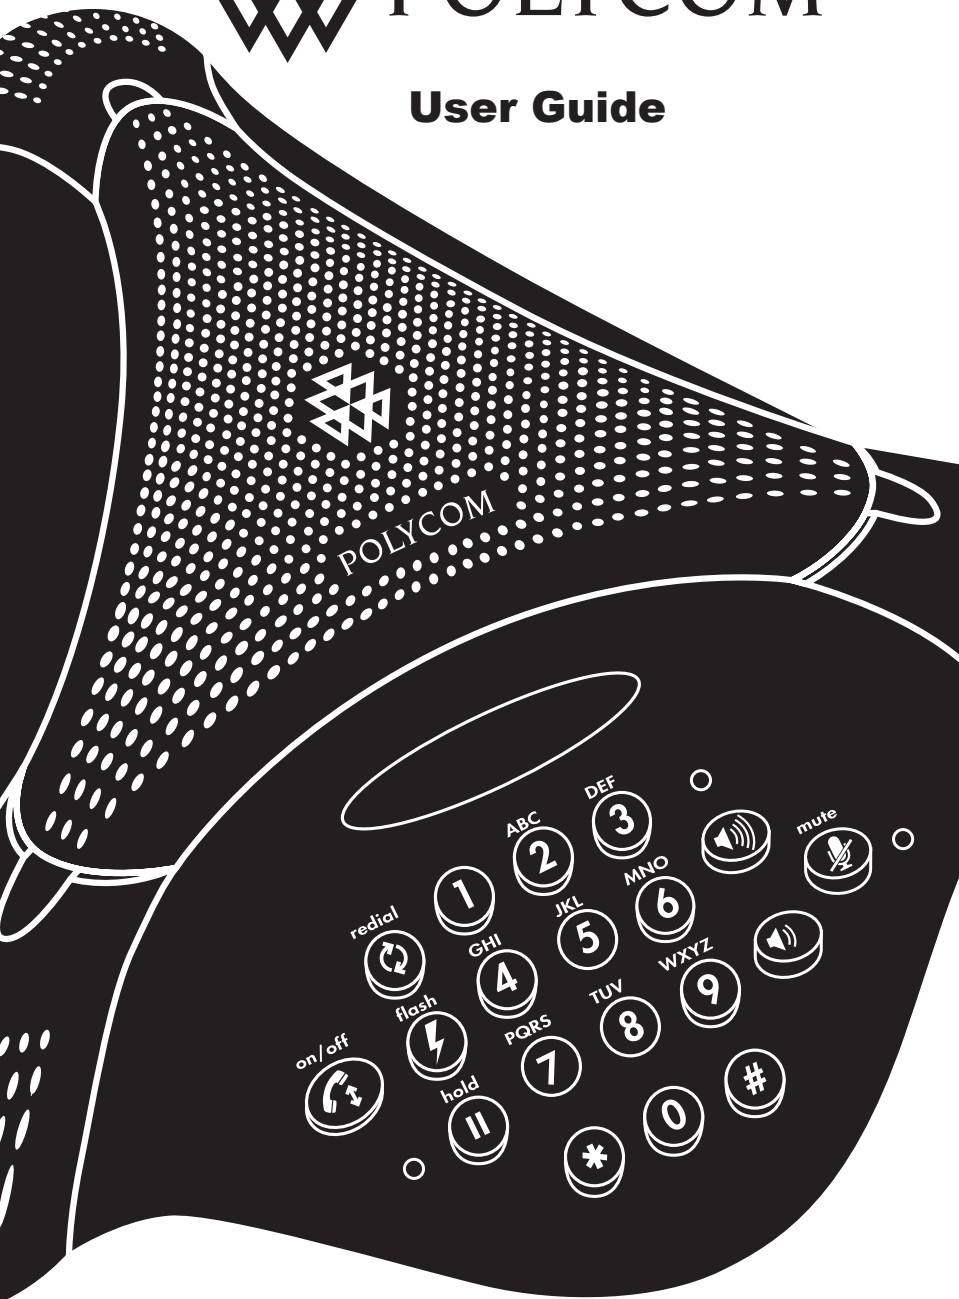

VoiceStation™ 300

USER GUIDE

Contents

Introduction	3
Parts List	3
For Best Performance.....	3
Installing VoiceStation™ 300.....	4
Using VoiceStation™ 300	5
Maintenance	8
Troubleshooting	8
Polycom Limited Warranty.....	9
Limitation of Liability	9
Copyright.....	10
US and Canada Regulatory and Compliance Information	10
Exhibit J - Customer Information	12




Introduction

Thank you for choosing Polycom's VoiceStation™ 300. VoiceStation™ 300 uses Polycom's unique Acoustic Clarity Technology to provide clear, full-duplex, two-way voice communication for your meetings. In addition, VoiceStation™ 300 adapts dynamically to the room environment to eliminate echoes and clipping. Three built-in microphones pick up sound all around the room so you can speak naturally and be easily understood.

Please review this User Guide before using the phone. Save this User Guide for future reference.

Please take a moment now to complete and mail your VoiceStation™ 300 registration card, or register online at www.polycom.com.


Parts List



Note: Refer to Quick Start Guide for additional information.


For Best Performance

- ▶ Place VoiceStation™ 300 in the center of a table or desk.
- ▶ Locate VoiceStation™ 300 in a room with soft furnishings such as carpets, curtains, and sound-absorbing walls and ceilings.
- ▶ Keep papers and other objects away from your SoundStation™ 300.
- ▶ Speak at normal volume.
- ▶ Speak toward your VoiceStation™ 300.

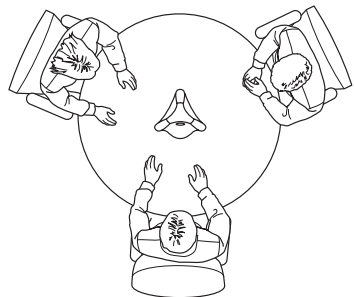

Installing VoiceStation™ 300


1. Connect one end of the long console cable to the bottom of the phone.



-
2. Insert the Power Supply plug into a nearby electrical outlet.


-
3. Connect the other end of the long console cable to the bottom of the Power Supply. VoiceStation™ 300 will run a brief self-test, and then you will hear a tone. If you don't hear the tone, verify that the outlet is working and the power is switched on.

-
4. Connect the short telephone cable to the Power Supply. Your System Administrator can help you to identify a standard analog phone line.

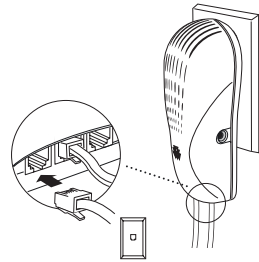

-
5. Connect the other end of the short telephone cable to a jack wired for a standard analog phone line.

- ▶ Do not plug the VoiceStation™ 300 into a digital telephone network. Doing so may damage the phone.



6. Place VoiceStation™ 300 in the center of the room on a flat, stable surface and press the Volume Up and Volume Down buttons to adjust the Ringer.



- ▶ The Ringer has three modes: High, Low, and Off. The Ringer sounds when you press the Volume buttons to indicate current status.



▶ When the On/Off indicator light is on, the Volume buttons control the sound level of the speaker.
 ▶ When the On/Off indicator light is off, the Volume buttons control the ringer volume.

7. Press the On/Off button to obtain a dial tone.



- ▶ If you do not hear a dial tone, you may not be connected to an analog telephone line. For assistance, contact your System Administrator.

Using VoiceStation™ 300

Keypad



Dialing a Number

Example:



Answer a Call



Press the button when VoiceStation™ 300 rings.

Adjust Speaker Volume



When a call is in progress, press the Volume Up or Volume Down button to adjust the sound level.

Microphone Mute



Press the Mute button to turn off the microphones and prevent the other party from hearing your conversation. The red indicator lights near the microphones will be on. The speaker is still active and you can hear the other party. Press the Mute button again to resume two-way communication. The red indicator lights will go out.

Place a call on Hold



Press the Hold button to place a call on hold. The red indicator lights near the microphones will blink. Press the Hold button again to resume two-way communication. The red indicator lights will go out.

Special Features



Your telephone system may provide special features such as Call Waiting, Conference, or Transfer which can be accessed by pressing the Special Features key. Ask your System Administrator for more information on special features available with your phone system.

End a Call



Press the On/Off button to end the call.


Redial



Press the Redial button.

Record a Conversation

Plug the end of a cable with RCA-type connectors into the Aux Out jack on the Power Supply. Plug the other end of the cable into the Aux In jack of your tape recorder.




Private Conversations

Plug a telephone into the data port on the SoundStation 300 wall module. Press the Hold button to place the call on hold, then pick up the receiver of the telephone connected to the data port. You may also connect a fax machine or computer modem to the data port.

Wall Module

Data port options

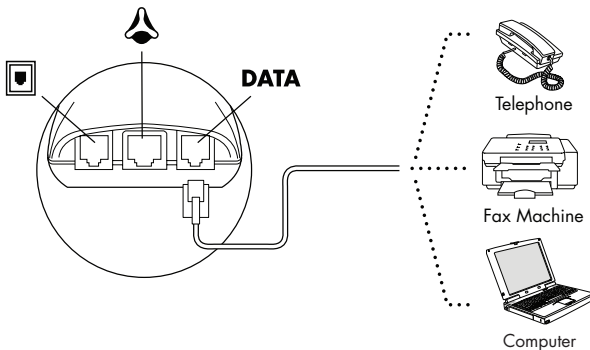

Maintenance

Clean the VoiceStation™ 300 with a soft, dry cloth.
Do not use alcohol- or petroleum-based cleaners.

Troubleshooting

No Dial Tone

- ▶ Check that all connections are correct and tight.
- ▶ Make sure the short cable is connected to a standard analog phone line.
- ▶ Try a different telephone line.

Phone Does Not Ring

- ▶ Adjust the Ringer with the Volume up button.

Short Silences, Echoes, or Clipped Speech

- ▶ Do not move VoiceStation™ 300 while it is in use.
- ▶ Keep your hands away from the phone during calls.
- ▶ Keep papers, cups, coffee pots, and other objects away from the phone.
- ▶ At the beginning of a call, allow each speaker present to speak in turn for a few moments to enable the phone's electronics to adjust to the acoustic environment.
- ▶ The other party may be using low quality equipment or a half-duplex conference bridge, in which case there is no solution.

Muffled or "In a Well" Reception

- ▶ Speak closer to the phone so that the microphones pick up your speech more accurately.
- ▶ Add more sound absorbency to the room.

Excessive Noise

- ▶ Noisy equipment such as a computer or fan may make it difficult to hear the other party. Both parties should turn off noisy equipment.
- ▶ Try calling again to see if a different line provides a better connection.

Physical Damage

- ▶ If physical damage is severe enough that the internal parts become visible, disconnect the VoiceStation™ 300 immediately.
- ▶ Do not reconnect to the network until the VoiceStation™ 300 has been repaired.

Polycom Limited Warranty

Polycom warrants to the end user that the system will be in good working order on the date Polycom or its authorized reseller delivers or installs the system, whichever is later (Warranty Date). If you notify Polycom or its Authorized Dealer within one year of the Warranty Date that the system is not in good working order, Polycom will, without charge, repair or replace, at its option, the system components that are not in good working order. Repair or replacement parts may be new or refurbished and will be provided on an exchange basis. If Polycom determines that your system cannot be repaired or replaced, Polycom will remove the system and, at your option, refund the purchase price of your system or apply the purchase price towards the purchase of another Polycom system. A summary of Polycom maintenance coverage may be obtained from Polycom by calling 1.800.451.0995 (in the continental U.S. only). If you purchased your system from a Polycom Authorized Dealer, contact your reseller for the details of the maintenance plan applicable to your system. This Polycom

limited warranty covers damage to the system caused by power surges. Polycom will not be responsible under this limited warranty for damages resulting from:

- ▶ Failure to follow Polycom's installation, operation, or maintenance instructions.
- ▶ Unauthorized system modification, movement, or alteration.
- ▶ Unauthorized use of common carrier communication services accessed through the system.
- ▶ Abuse, misuse, negligent acts or omissions of the customer and persons under the customer's control; or
- ▶ Acts of third parties and acts of God.

Polycom's obligation to repair, replace, or refund, as set forth above, is your exclusive remedy. Except as specifically set forth above, Polycom, its affiliates, suppliers, and dealers make no warranties, express or implied, and specifically disclaim any warranties of merchantability or fitness for a particular purpose.

Limitations of Liability

The liability of Polycom and its affiliates and suppliers for any claims, losses, damages, or expenses from any cause whatsoever (including acts or omissions of third parties), regardless of the form of action, whether in contract, tort, or otherwise, shall not exceed the lesser of: (1) the direct damages proven; or (2) the repair cost, replacement cost, license fee, annual rental charge, or purchase price, as the case may be, of the equipment that gives rise to the claim. In no event shall Polycom and its affiliates and suppliers be liable for any incidental, special, reliance, consequential,

or indirect loss or damage arising out of or in anyway in connection with the use of the equipment. As used in this paragraph, consequential damages include, but are not limited to, the following: lost profits, lost revenues, and losses arising out of unauthorized use (or charges for such use) of common carrier telecommunications services or facilities accessed through or connected to the equipment. For personal injury caused by Polycom's negligence, Polycom's liability shall be limited to proven damages. No action or proceeding against Polycom or its affiliates or

suppliers may be commenced more than twenty-four (24) months after the cause of action accrues.

THIS PARAGRAPH SETS FORTH THE EXCLUSIVE REMEDY FOR ANY CLAIMS, LOSSES, DAMAGES OR EXPENSES ASSOCIATED WITH THE EQUIPMENT AND REGARDLESS OF A FAILURE OF ESSENTIAL PURPOSE.

Copyright

All rights reserved under International and Pan-American Copyright Conventions. No part of the contents of this manual may be copied, reproduced, or transmitted in any form or by any means, or translated into another language or format, in whole or part, without written consent of Polycom, Inc. The software contained within this product is protected by United States copyright laws and international treaty provisions. Polycom, Inc., retains title and ownership of all property rights with respect to the software within this product. You shall

not (and shall not allow any third party to) decompile, disassemble, or otherwise reverse engineer or attempt to reconstruct or discover any source code or underlying ideas or algorithms of the software by any means whatsoever. Do not remove (or allow any third party to remove) any product identification, copyright or other notices. Polycom® and the logo design are registered trademarks and VoiceStation™ 300 and Acoustic Clarity Technology™ are trademark of Polycom, Inc. in the United States, and various countries.

FCC Rules

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference

to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ▼ Reorient or relocate the receiving antenna.
- ▼ Increase the separation between the equipment and receiver.
- ▼ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ▼ Consult the dealer or an experienced radio/TV technician for help.

In accordance with part 15 of the FCC rules, the user is cautioned that any changes or modifications not expressly approved by Polycom Inc. could void the user's authority to operate the equipment.

Canadian Department of Communications Notice

This Class [B] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme N M B-003 du Canada.

Ring Equivalency Number (REN)

The REN is used to determine the quantity of devices that may be connected to the telephone line. Excessive RENs on the telephone line may result in the devices not ringing in response to an incoming

call. Typically the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line (as determined by the total RENs) contact the local telephone company.

Automatic Dialing

WHEN PROGRAMMING EMERGENCY NUMBERS AND/OR MAKING TEST CALLS TO EMERGENCY NUMBERS:

1. Remain on the line and briefly explain to the dispatcher the reason for

the call.

2. Perform such activities in the off-peak hours, such as early morning or late evening.

Telephone Company Connector

A FCC compliant telephone cord and modular plug is provided with this equipment. This equipment is designed to be connected to the telephone network

or premises wiring using a compatible modular jack that is Part 68 complaint. See the rest of these installation instructions for details.

Canadian Telephone Company Requirements

NOTICE: The Industry Canada label identifies certified equipment. This certification means that the equipment meets telecommunications protective, operational and safety requirements as prescribed in the appropriate Terminal Equipment Technical Requirements document(s). The Department does not guarantee the equipment will operate to the user's satisfaction.

Before installing this equipment, users should ensure that it is permissible to be connected to the facilities of the local telecommunications company. The equipment must also be installed using an acceptable method of connection. The

customer should be aware that compliance with the above conditions may not prevent degradation of service in some situations. Repairs to certified equipment should be coordinated by a representative designated by the supplier. Any repairs or alterations made by the user to this equipment, or equipment malfunctions, may give the telecommunications company cause to request the user to disconnect the equipment.

Users should ensure for their own protection that the electrical ground connections of the power utility, telephone lines and internal metallic water pipe system, if present, are connected together.

This precaution may be particularly important in rural areas.

Caution: Users should not attempt to make such connections themselves, but should contact the appropriate electric inspection authority, or electrician, as appropriate.”

“NOTICE: The Ringer Equivalence Number (REN) assigned to each relevant terminal device provides an indication of the maximum number of terminals

allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the Ringer Equivalence Numbers of all the devices does not exceed 5.”

The term “IC:” before the certification/ registration number dignifies only that the Industry Canada technical specifications were met.

Exhibit J - Customer Information

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the exterior of the cabinet of this equipment is a label that contains, among other information,

- FCC Registration Number:
- Ringer Equivalence Number (REN):
- Facility Interface Code (FIC):
- Service Order Code (SOC):
- USOC Jack Type:

a product identifier in the format US: 2HWTE09BVOICEST. If requested, this number must be provided to the telephone company.

US: 2HWTE09BVOICEST
0.9B
02LS2
6.0Y
RJ11C

If this equipment VoiceStation™ 300 causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

The telephone company may make changes to its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens, the telephone company will provide advance notice so you can make the necessary modifications to maintain uninterrupted service.

If trouble is experienced with this equipment VoiceStation™ 300, for repair or warranty information, please contact Polycom Inc.: 1-888-248-4143; 1-408-474-2067 Option 1; 4750 Willow Road, Pleasanton, CA 94588-2708, USA; or <http://www.polycom.com>. If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.

Connection to party line service is subject to state tariffs. (Contact the state public utility commission, public service commission or corporate commission for information.)

Portions of the software contained in this product are Copyright © 1995 - 2003, SPIRIT.

CE Mark R & TTE Directive (EU Only)

This VoiceStation™ 300 has been marked with the CE mark. This mark indicates compliance with EEC Directives 89/336/EEC, 73/23/EEC/1999/5/EC. A full copy of the Declaration of Conformity can be obtained from Polycom Ltd., 270 Bath Road, Slough, Berkshire, SL1 4DX, UK.

Polycom Ltd. tímto prohlašuje, že tento VoiceStation™ 300 je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Undertegnede Polycom Ltd. erklærer herved, at følgende udstyr VoiceStation™ 300 overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Hiermit erklärt Polycom Ltd., dass sich das Gerät VoiceStation™ 300 in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

Käesolevaga kinnitab Polycom Ltd. seadme VoiceStation™ 300 vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Hereby, Polycom Ltd., declares that this VoiceStation™ 300 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Por medio de la presente Polycom Ltd. declara que el VoiceStation™ 300 cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Polycom Ltd. ΔΗΛΩΝΕΙ ΟΤΙ VoiceStation™ 300

ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/EK.

Par la présente Polycom Ltd. déclare que l'appareil VoiceStation™ 300 est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Con la presente Polycom Ltd. dichiara che questo VoiceStation™ 300 è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Ar šo Polycom Ltd. deklarē, ka VoiceStation™ 300 atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.

Šiuo Polycom Ltd. deklaruoja, kad šis VoiceStation™ 300 atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Hierbij verklaart Polycom Ltd. dat het toestel VoiceStation™ 300 in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Hawnhekk, Polycom Ltd., jiddikjara li dan VoiceStation™ 300 jikkonforma mal-htigijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Direttiva 1999/5/EC.

Alulírott, Polycom Ltd. nyilatkozom, hogy a VoiceStation™ 300 megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Niniejszym Polycom Ltd. oświadcza, że VoiceStation™ 300 jest zgodne z zasadniczymi wymaganiami oraz innymi stosownymi postanowieniami Dyrektywy 1999/5/WE

Polycom Ltd. declara que este VoiceStation™ 300 está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Polycom Ltd. tímto vyhlasuje, že VoiceStation™ 300 splňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Polycom Ltd. vakuuttaa täten että VoiceStation™ 300 tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Härmed intygar Polycom Ltd. att denna VoiceStation™ 300 står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Hér með lýsir Polycom Ltd. yfir því að VoiceStation™ 300 er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC

Polycom Ltd. erklærer herved at utstyret VoiceStation™ 300 er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.



Technical Support in the United States:
Phone: 408-526-9000 Internet: <http://www.polycom.com>

Polycom, Inc. 1565 Barber Lane, Milpitas, CA 95035
Phone: 408-526-9000 or toll-free in the US: 800-POLYCOM
Facsimile: 408-526-9100

Polycom®, VoiceStation™, and the Polycom logo design are registered trademarks of Polycom, Inc. in the US and various countries. © 2005 Polycom, Inc. All Rights Reserved.