



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/02/25	

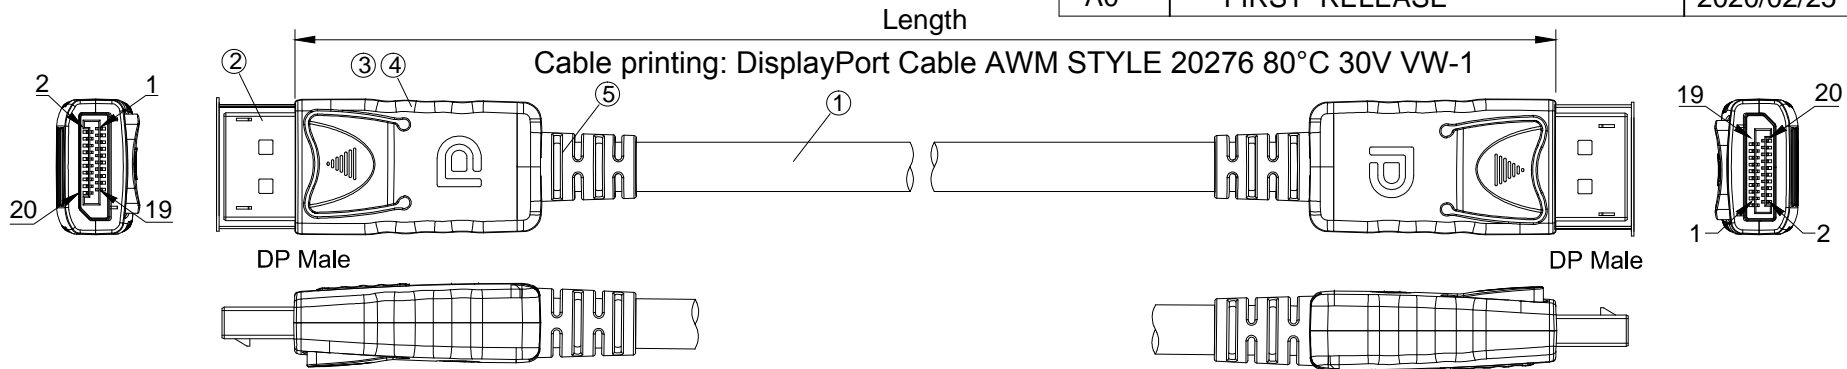


Signal Assignment

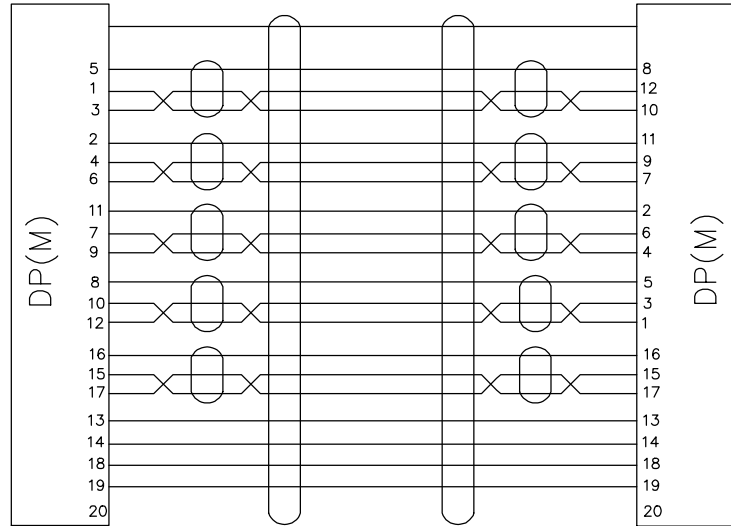

- Remark:
- 100% Open/Short Test
 - Conductive Resistance:15ohms MAX
 - Insulation Resistance:5M ohm MIN.
 - HI-POT:DC 300V/10MS.
 - The product is RoHS compliant.
 - Dp to Dp 1.4V,working as 8K@60Hz,4K@120Hz and 4K@60Hz.

Item NO.	Length(m)
AK4071	1.0m
AK4073	2.0m
AK4074	3.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	SR 45P PVC, Black	2PCS	
④	Shell Top and Bottom Shell, ABS with "D"Black	2SETs	
③	Inernal Mold Inner Mould PE	2PCS	
②	Connector DP male head hook, Gold-Plated	2PCS	
①	Cable DP 1.4V28AWG [(7/0.127TC+FPE)*1P+7/0.127TC+AL]*5C+(7/0.127TC+HDPE)*4C+AL+D+160/0.12ALB+PVCOD7.3mmBlack		



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION Dp to Dp Cable		PAGE NO	1/1
		DATE	2020/02/25
APPROVAL	CHECKED	DRAWN	