



by Schneider Electric

# Switched Rack PDU AP7921B


## Overview

The APC by Schneider Electric Switched Rack Power Distribution Unit (PDU) distributes power to devices in the rack. It can be monitored through Web, Telnet, SNMP, SSH, StruxureWare Data Center Expert<sup>®</sup> interfaces.

**Outlets:** The outlets connect the Rack PDU to equipment in your rack or enclosure. Each outlet allows independent control of the connected equipment and the Rack PDU firmware also provides Outlet User accounts. The PDU has eight IEC-320-C13 outlets.

**Power cord:** The Rack PDU has an IEC-320-C20 inlet on the front of the unit to connect to the power cord. The power cord connects the Rack PDU to one power source. The cord connects to the front of the Rack PDU for easier mounting and user access. The 8 foot (2.4 meter) cord terminates with a C20 plug.

**Digital display:** The digital display shows the aggregate current being used by the Rack PDU.

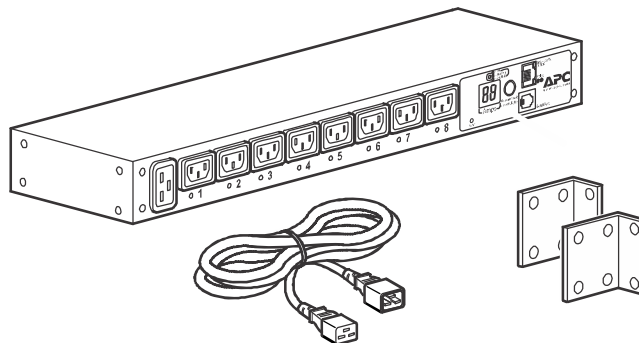

# Specifications

<b>Electrical</b>	
Input connectors	IEC-320-C20 inlet
Output connectors	Eight IEC-320-C13 outlets
Cord length	8 ft (2.4 m)
Nominal input voltage	208–230 VAC
Acceptable input voltage	200–240 VAC
Input frequency	50/60 Hz
Maximum current	16A max total; 12A max/outlet (UL) 12A max total; 12A max/outlet (cUL) 16A max total; 10A max/outlet (VDE)
<b>Physical</b>	
Size (H x W x D)	1.73 x 17.50 x 4.25 in (4.45 x 44.45 x 10.80 cm)
Weight	5 lb (2.26 kg)
Shipping weight	7.6 lb (3.4 kg)
<b>Environmental</b>	
Elevation (above MSL): Operating: Storage:	0 to 10,000 ft (0 to 3000 m) 0 to 50,000 ft (0 to 15 000 m)
Temperature: Operating: Storage:	23 to 113° F (–5 to 45° C) –13 to 149° F (–25 to 65° C)
Humidity: Operating: Storage:	5 to 95%, non-condensing 5 to 95%, non-condensing
<b>Compliance</b>	
Safety	UL, cUL, CE, VDE
EMC	FCC Part 15 Class A, ICES-003, VCCI, EN55022, EN55024, AS/NZS

Customer support and warranty information are available on the website, [www.apc.com](http://www.apc.com).

© 2016 APC by Schneider Electric. All rights reserved.

990-5826-001  
9/2016