


REV.	REVISION	DATE

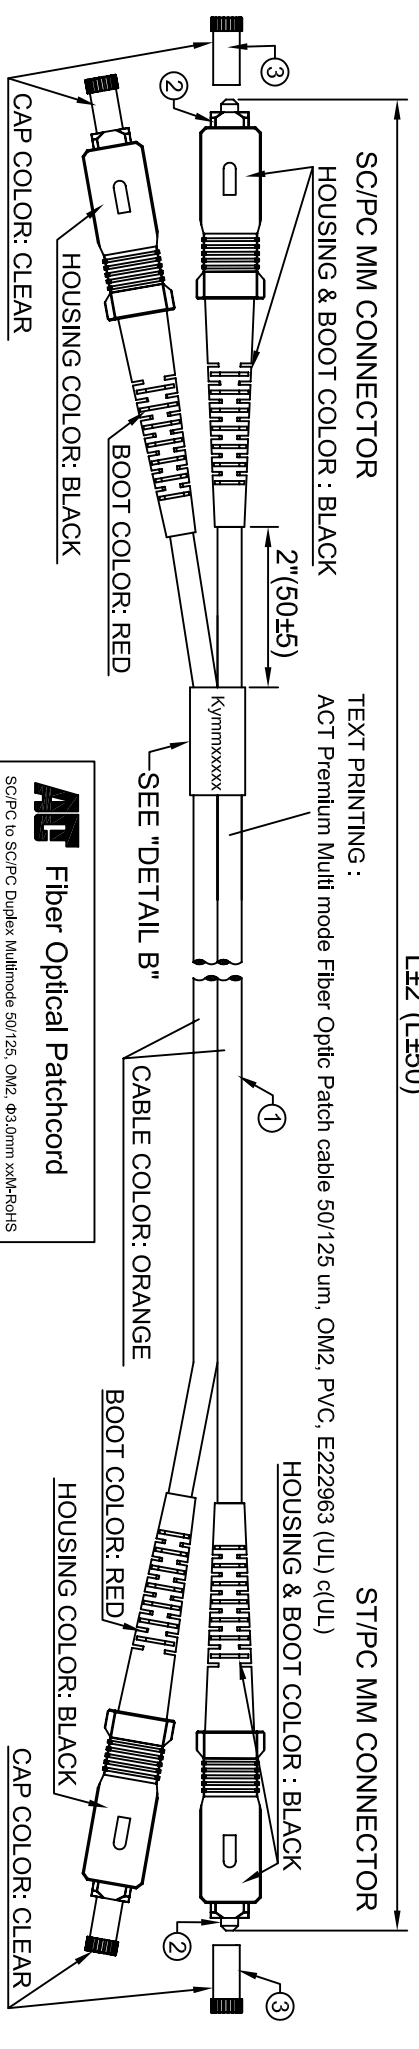

NOTE:

1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 56 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	POLYBAG
LARGE	POLYBAG	POLYBAG
EACH LARGE POLYBAG IN AN OUTER CARTON		

ATF Fiber Optical Patchcord

SC/PC to SC/PC Duplex Multimode 50/125 OM2, Ø3.0mm xxM-RoHS

Model: xxxxxx -xxxxxx

Lot number

Performance: (@23°C) A=850/1310±20nm

Insertion Loss ≤ 0.3dB



Serial No

A	850nm	1310nm
B		
C		
D		

Kymmmxxxxx

X X X X X X X X X X X X X X X X

Prepared By: _____ Date: _____

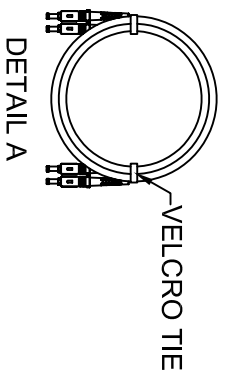

Y: Year; mm: Month
xxxxx: Serial Number

RL3550	50	50	164'(50000)	443250-RL3550	8716065223880
RL3520	20	20	65.6'(20000)	443220-RL3520	8716065223873
RL3515	15	15	49.2'(15000)	443215-RL3515	8716065223886
RL3510	10	10	32.8'(10000)	443210-RL3510	8716065223859
RL3505	05	5	16.4'(5000)	443205-RL3505	8716065223842
RL3503	03	3	9.84'(3000)	443203-RL3503	8716065223835
RL3502	02	2	6.56'(2000)	443202-RL3502	8716065223828
RL3551	51	1.5	4.92'(1500)	4432015-RL3551	8716065223811
RL3501	01	1	3.28'(1000)	443201-RL3501	8716065223804
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL: _____ DATE: _____



	UNIT: Inches[mm]	TITLE: PATCHCORD SC-SC MULTIMODE DUPLEX 50/125, OM2, 3.0mm, ORANGE.
DRAWN BY: Catherine	DATE: 2007/10/4	CUSTOMER: _____
CHECKED BY: _____	DATE: _____	CUSTOMER PART NO: _____
APPROVED BY: _____	DATE: _____	Ref. NO: _____ REV. _____
SALE BY: _____	DATE: _____	TRENDEx PART NO: _____

ITEM	QTY	PART NO.	DESCRIPTION
3	4PCS		SC DUST COVER, CLEAR.
2	4SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.
PART LIST			