RoHS COMPLIANT

1 OF 1

REV.	REVISION	DATE

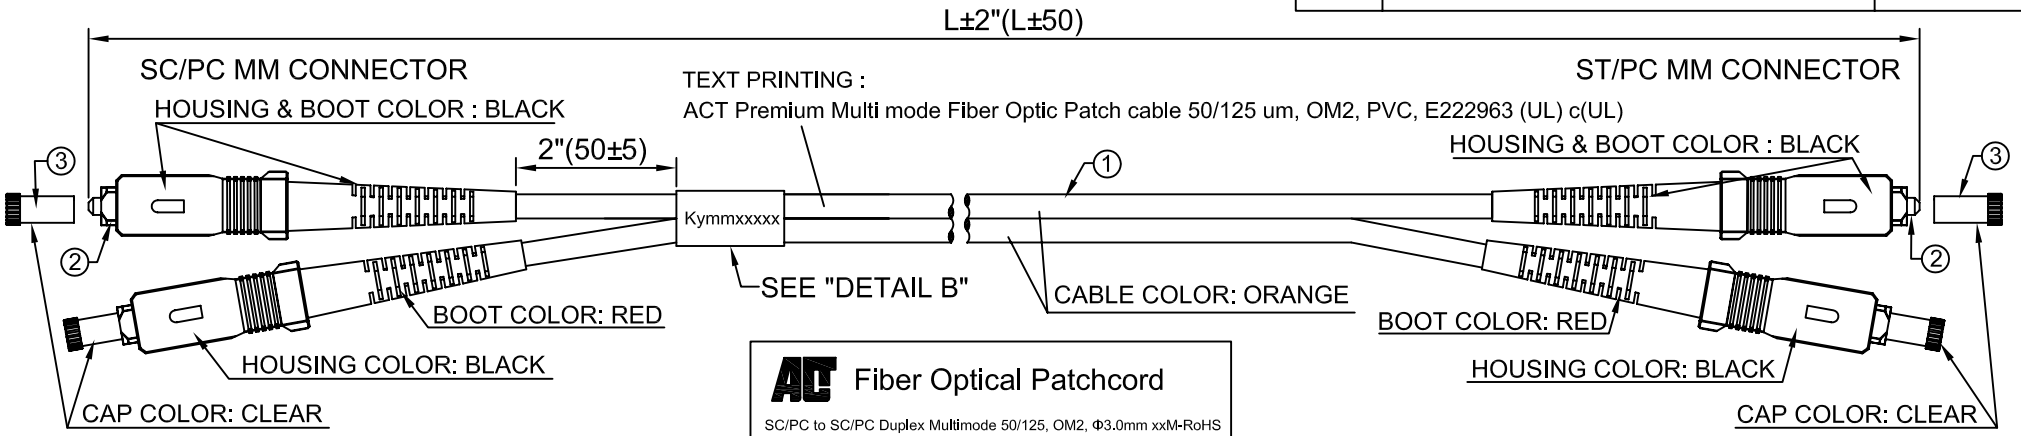

NOTE:
1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

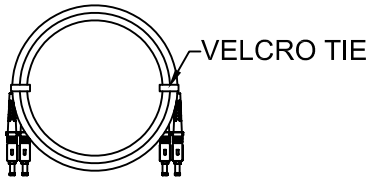

DETAIL A



DETAIL B

y: Year; mm: Month
xxxxx: Serial Number

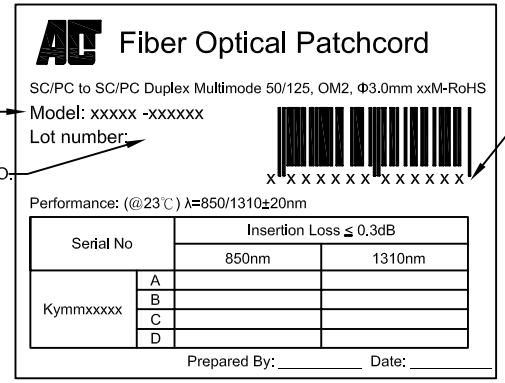

DETAIL C

RL3550	50	50	164'(50000)	443250-RL3550	8716065223880
RL3520	20	20	65.6'(20000)	443220-RL3520	8716065223873
RL3515	15	15	49.2'(15000)	443215-RL3515	8716065223866
RL3510	10	10	32.8'(10000)	443210-RL3510	8716065223859
RL3505	05	5	16.4'(5000)	443205-RL3505	8716065223842
RL3503	03	3	9.84'(3000)	443203-RL3503	8716065223835
RL3502	02	2	6.56'(2000)	443202-RL3502	8716065223828
RL3551	51	1.5	4.92'(1500)	4432015-RL3551	8716065223811
RL3501	01	1	3.28'(1000)	443201-RL3501	8716065223804
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL: DATE:

ITEM	Q'TY	PART NO.	DESCRIPTION
3	4PCS		SC DUST COVER, CLEAR.
2	4SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.

PART LIST

UNIT: Inches[mm]		TITLE: PATCHCORD SC-SC MULTIMODE DUPLEX 50/125, OM2, 3.0mm, ORANGE.	
DRAWN BY: Catherine	DATE: 2007/10/4	CUSTOMER	CUSTOMER PART NO.: RL35**
CHECKED BY	DATE	DRAWING NO.: PK709007	Ref. NO. / REV.: A
APPROVED BY	DATE		
SALE BY	DATE	TRENDEX PART NO.	