


- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10kg.
 6. PACKING: EACH LARGE POLYBAG IN AN OUTER CARTON

ROUND CABLE METHOD SEE "DETAIL A"	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TESC CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE

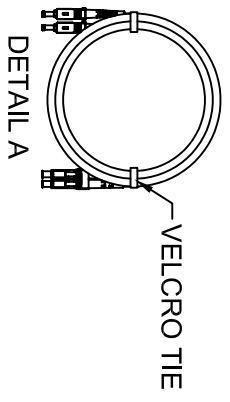


ATF Fiber Optical Patchcord

SC/PC to LC/PC Duplex Multimode 50/125, OM2, Ø2.0mm xxM-FoHS
 Model: xxxxx -xxxxx
 Lot number: Xxxxxxx

Performance: (@23°C) λ=850/1310±20nm
 Insertion Loss ≤ 0.3dB

Serial No	Insertion Loss
A	850nm
B	1310nm
C	
D	

Prepared By: _____ Date: _____



DETAIL B
 Y: Year mm: Month
 xxxxx: Serial Number

ITEM	QTY	PART NO.	DESCRIPTION
5	2PCS		LC DUST COVER, WHITE.
4	2SETS		CONNECTOR, LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
3	2PCS		SC DUST COVER, CLEAR.
2	2SETS		CONNECTOR, SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 2.0mm ZIPCORD, OFNR, ORANGE JACKET.

RL8550	50	50	164(50000)	943250-RL8550	8716065227482
RL8530	30	30	98.4(30000)	943230-RL8530	8716065227475
RL8520	20	20	65.6(20000)	943220-RL8520	8716065224511
RL8515	15	15	49.2(15000)	943215-RL8515	8716065224504
RL8510	10	10	32.8(10000)	943210-RL8510	8716065224498
RL8505	05	5	16.4(5000)	943205-RL8505	8716065224481
RL8503	03	3	9.84(3000)	943203-RL8503	8716065224474
RL8502	02	2	6.56(2000)	943202-RL8502	8716065224467
RL8551	51	1.5	4.92(1500)	9432015-RL8551	8716065224450
RL8501	01	1	3.28(1000)	943201-RL8501	8716065224443

PART NO. ** L

CUSCOMER APPROVAL: _____ DATE: _____

ATF

UNIT: Inches[mm]

DRAWN BY: Ruby DATE: 2008/7/4

CHECKED BY: _____ DATE: _____

APPROVED BY: _____ DATE: _____

SALE BY: _____ DATE: _____

TITLE: PATCHCORD SC-LC MULTIMODE DUPLEX 50/125, OM2, 2.0mm, ORANGE.

CUSCOMER: _____ CUSCOMER PART NO. _____

DRAWING NO. PK709021 Ref. NO. _____ REV. C

TRENDX PART NO. _____