


REV.	REVISION	DATE
C	CHANGED THE CABLE OD	2008/7/4

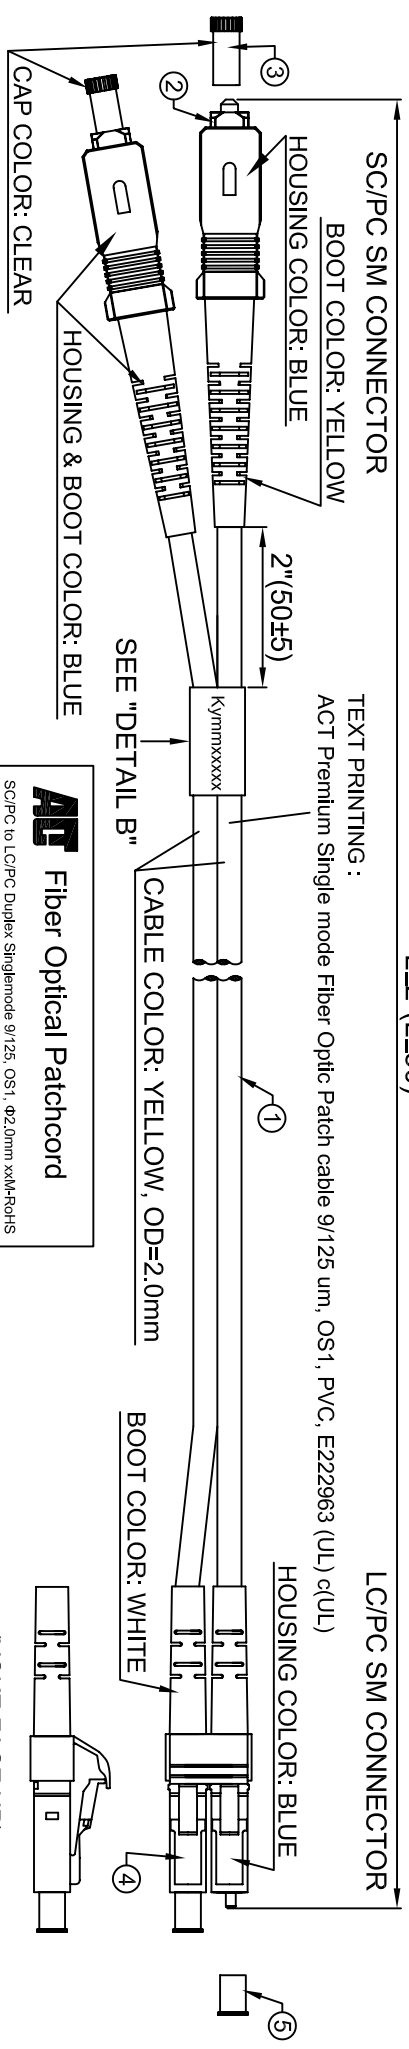

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10KG.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"

SMALL	MEDIUM	LARGE
BAG TYPE	POLYBAG	POLYBAG
QTY	5 CABLES	ALL
LABEL	SEE "DETAIL C"	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

ATF Fiber Optical Patchcord

SC/PC to LC/PC Duplex Singlemode 9/125, OS1, ϕ 2.0mm xxM-RoHS

Model: xxxxx-xxxxx


Lot number: Xxxxxxx

Performance: (@23°C) λ =850/1310±20nm

Insertion Loss \leq 0.3dB


Serial No	A	B	C	D
850nm				
1310nm				

Prepared By: _____ Date: _____



DETAIL B

y: Year: mm: Month
xxxxx: Serial Number

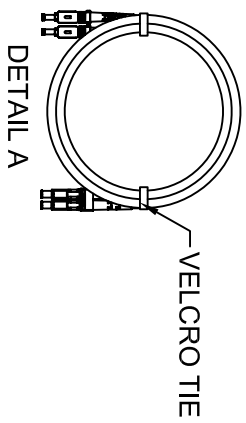

ITEM	QTY	PART NO.	DESCRIPTION
5	2PCS		LC DUST COVER, WHITE.
4	2SETS		CONNECTOR: LC/PC SM BLUE HOUSING WITH WHITE BOOT.
3	2PCS		SC DUST COVER, CLEAR.
2	2SETS		CONNECTOR: SC/PC SM, BLUE HOUSING WITH YELLOW & BLUE BOOT.
1	1PC		CABLE: SINGLEMODE, 9/125um, 2.0mm ZIPCARD, OFNR, YELLOW JACKET.

RL8950	50	50	164'(50000)	941250-RL8950	8716065227505
RL8930	30	30	98.4'(30000)	941230-RL8930	8716065227499
RL8920	20	20	65.6'(20000)	941220-RL8920	8716065224597
RL8915	15	15	49.2'(15000)	941215-RL8915	8716065224580
RL8910	10	10	32.8'(10000)	941210-RL8910	8716065224573
RL8905	05	5	16.4'(5000)	941205-RL8905	8716065224566
RL8903	03	3	9.84'(3000)	941203-RL8903	8716065224559
RL8902	02	2	6.56'(2000)	941202-RL8902	8716065224542
RL8951	51	1.5	4.92'(1500)	9412015-RL8951	8716065224535
RL8901	01	1	3.28'(1000)	941201-RL8901	8716065224528

PART NO. ** L DATE: _____

CUSTOMER APPROVAL: _____

ATF

UNITS: Inches/mm

DRAWN BY: Ruby DATE: 2008/7/4

CHECKED BY: _____ DATE: _____

APPROVED BY: _____ DATE: _____

SALE BY: _____ DATE: _____

TITLE: PATCHCORD SC-LC SINGLEMODE DUPLEX 9/125, OS1, 2.0mm, YELLOW.

CUSTOMER: _____ CUSTOMER PART NO.: _____

DRAWING NO.: PK709022 Ref. NO.: _____ REV. C

TRENDX PART NO. _____