


REV.	REVISION	DATE
B	ADD THE PART NO.	2008/1/4

L ±2" (L ±50)

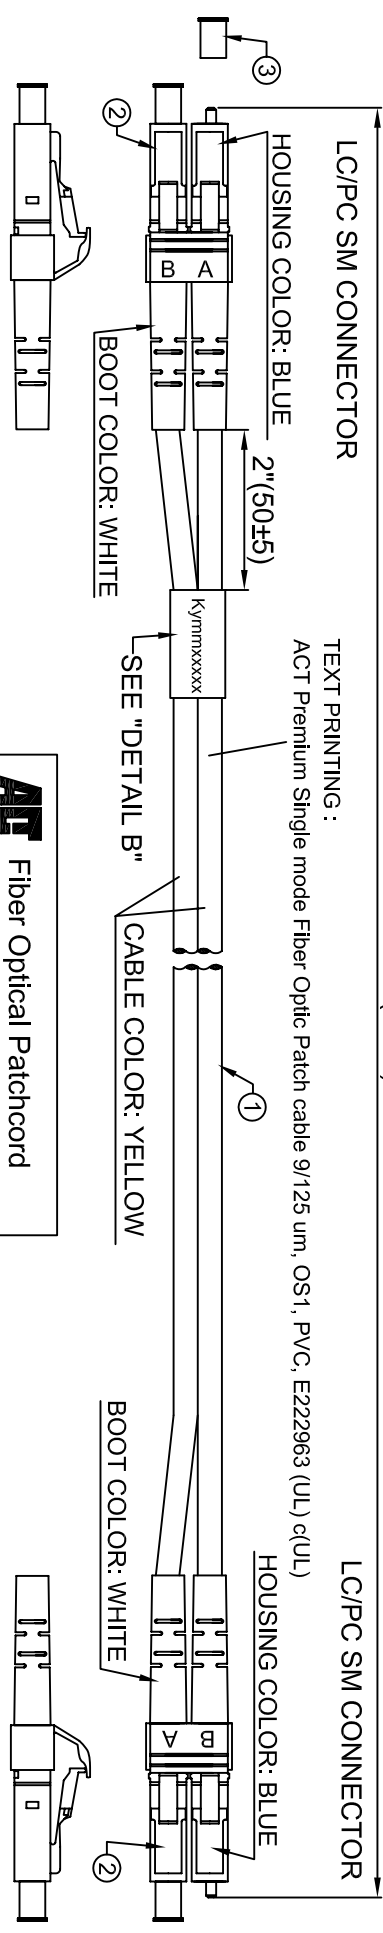


NOTE:

1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5SM DOUBLE AMPLITUDE.
5. TENSILE LENGTH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL POLYBAG	1 CABLE WITH TELC CARD	SEE "DETAIL C"
MEDIUM POLYBAG	5 CABLES	NONE
LARGE POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

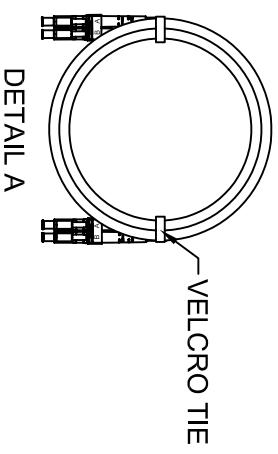

ATF Fiber Optical Patchcord

LC/PC to LC/PC Duplex Singlemode 9/125, OS1, ϕ 2.0mm xxM-RoHS


Model: xxxxx-xxxxx
Lot number: X X X X X X X X X X X X X X X X

Performance: (@23°C) λ =850/1310±20nm

Serial No	Insertion Loss \leq 0.3dB
A	850nm
B	1310nm
C	
D	

Prepared By: _____ Date: _____

DETAIL C



DETAIL B

Y: Year; mm: Month
xxxxx: Serial Number

ITEM	Q'TY	PART NO.	DESCRIPTION
3	4PCS		LC DUST COVER, WHITE.
2	4SETS		CONNECTOR, LC/PC SM BLUE HOUSING WITH WHITE BOOT.
1	1PC		CABLE: SINGLEMODE, 9/125um, 2.0mm ZIPCORD, OFNR, YELLOW JACKET.

PART LIST

SEE TABLE "DESCRIPTION 2"

RL9950	50	50	164'(50000)	991250-RL9950	8716065227567
RL9930	30	30	98.4'(30000)	991230-RL9930	8716065227550
RL9925	25	25	82'(25000)	991225-RL9925	8716065224825
RL9920	20	20	65.6'(20000)	991220-RL9920	8716065224818
RL9915	15	15	49.2'(15000)	991215-RL9915	8716065224801
RL9910	10	10	32.8'(10000)	991210-RL9910	8716065224795
RL9905	05	5	16.4'(5000)	991205-RL9905	8716065224788
RL9903	03	3	9.84'(3000)	991203-RL9903	8716065224771
RL9902	02	2	6.56'(2000)	991202-RL9902	8716065224764
RL9951	51	1.5	4.92'(1500)	9912015-RL9951	8716065224757
RL9901	01	1	3.28'(1000)	991201-RL9901	8716065224740
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CULCOMER APPROVAL:

DATE:



UNITS:	TITLE:
Inches(mm)	PATCHCORD LC-LC SINGLEMODE
DATE	DUPLEX 9/125, OS1, 2.0mm, YELLOW.
DATE	CULCOMER
DATE	CULCOMER PART NO.
DATE	DRAWING NO. PKT09025
DATE	Ref. NO. RL99**
DATE	REV. B
DATE	TRENDX PART NO.