


1 OF 1	REV. B	REVISION ADD THE PART NO.	DATE 2008/1/4
--------	--------	---------------------------	---------------

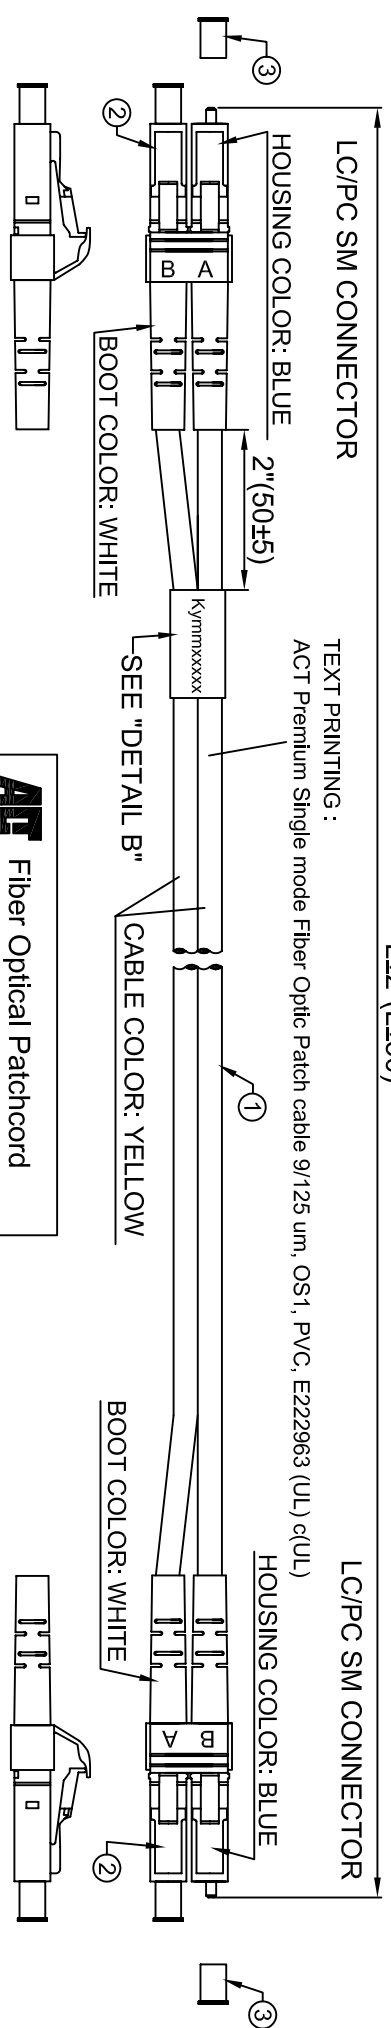

NOTE:
 1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5SM DOUBLE AMPLITUDE.
 5. TENSILE LENGTH: 10Kg.
 6. PACKING:



ROUND CABLE METHOD SEE "DETAIL A"	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TELC CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

ATF Fiber Optical Patchcord

Prepared By: _____ Date: _____

Serial No	Insertion Loss ≤ 0.3dB
A	850nm 1310nm
B	
C	
D	

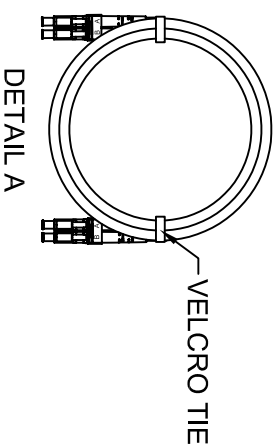

DETAIL B
 Y: Year; mm: Month
 xxxxx: Serial Number

ITEM	Q'TY	PART NO.	DESCRIPTION
3	4PCS		LC DUST COVER, WHITE.
2	4SETS		CONNECTOR, LC/PC SM BLUE HOUSING WITH WHITE BOOT.
1	1PC		CABLE: SINGLEMODE, 9/125um, 2.0mm ZIPCORD, OFNR, YELLOW JACKET.

RL9950	50	50	164'(50000)	991250-RL9950	8716065227567
RL9930	30	30	98.4'(30000)	991230-RL9930	8716065227550
RL9925	25	25	82'(25000)	991225-RL9925	8716065224825
RL9920	20	20	65.6'(20000)	991220-RL9920	8716065224818
RL9915	15	15	49.2'(15000)	991215-RL9915	8716065224801
RL9910	10	10	32.8'(10000)	991210-RL9910	8716065224795
RL9905	05	5	16.4'(5000)	991205-RL9905	8716065224788
RL9903	03	3	9.84'(3000)	991203-RL9903	8716065224771
RL9902	02	2	6.56'(2000)	991202-RL9902	8716065224764
RL9951	51	1.5	4.92'(1500)	9912015-RL9951	8716065224757
RL9901	01	1	3.28'(1000)	991201-RL9901	8716065224740
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

ATF

CULCOMER APPROVAL: _____ DATE: _____

DRAWN By: Catherine	DATE: 2008/1/4	UNIT: Inches/mm	TITLE: PATCHCORD LC-LC SINGLEMODE DUPLEX 9/125, OS1, 2.0mm, YELLOW.
CHECKED BY:	DATE:	CULCOMER	CULCOMER PART NO.
APPROVED BY:	DATE:	DRAWING NO. PKT09025	Ref. NO. RL99**
DATE:	DATE:	INDEX PART NO.	REV. B