



Video Decoder built-in 16ch Network Disk Recorder with Face Matching capability

Key Features

- H.264, MPEG-4 and JPEG multi format
 - Up to 16 network cameras can be connected and recorded.
 - Quick setup by automatic camera detection and simple setup wizard without the use of PC
 - "Referenced recording days" is automatically calculated by frame rate, image quality and HDD capacity.
 - Simple mouse operation by new GUI without the use of PC
 - Quick intuitive search with calendar and timeline
 - Live images from up to 16 cameras can be displayed simultaneously.
 - Supports the Full HD output (HDMI) that can display recorded images and live images in high definition
 - Real Time Face Matching function by matching registered face images with a face displayed on live images
- * Only channel 1 * Cameras supporting face detection function is required. (WV-NP502, WV-SP305, or WV-SP306 is recommended.)
- Face matching alarm is notified by Buzzer / E-mail / Panasonic alarm / Terminal output / Indicator.
 - Various alarm sources include 9x Terminal inputs, 16x Camera alarm, Panasonic Alarm Protocol. Flexible alarm actions include Alarm recording, E-mail notification, Alarm message, Camera positioning, Terminal output, Panasonic alarm protocol output, Buzzer and Indicator.
 - Camera Control: Pan/Tilt, Zoom, Focus, Brightness, Preset Position, Auto mode (depending on camera model)
 - Audio from the i-PRO network cameras can be recorded and played back, G.726 (ADPCM) 32 kbps.
 - Flexible Playback Controls: Goto Date (Jump to specific time/date), Goto Last (Jump to 30 s before the record end)
 - Various Display Modes: Spot, Multiscreen (4 / 16 split screen display, 3 / 4 / 6 / 9 / 12 / 16 split screen display on a full screen)
 - Various Recording Modes: Schedule, Event (Pre/Post)
 - Filtered Search: Time & Date, Event Type, Camera number, Timeline
 - Recorded images can be downloaded to a PC.
 - Downloadable viewer software allows playback of images downloaded from the Recorder.
 - Built-in network interface (10Base-T / 100Base-TX / 1000Base-T) for recording and client access


- Up to 4 clients can monitor image and control WJ-NV200 simultaneously.
- Up to 2 HDDs (3.5 inch Serial ATA) can be installed. (WJ-NV200 only)
- User authentication, 3 user levels and User level - Camera partitioning setup for user management of up to 16 user registrations
- Multi-recorder, Multi-site system can be made with optional WV-ASM200 i-PRO Management Software.
- Onvif NVC (Network Video Client), core spec Ver.1.02 conformant
- DVD drive built-in (WJ-NV200V)

Standard Accessories


• CD-ROM*	1 pc.	The following are for installation:	
• Mouse	1 pc.	• Power Cord	1 pc.
• Installation Guide	1 pc.	• HDD Fixing Screw.....	8 pcs.
• Quick Reference Guide	1 pc.	* The CD-ROM contains the operating instructions (PDFs).	

Additional Kit

Additional Business Intelligence Kit
WJ-NVF20

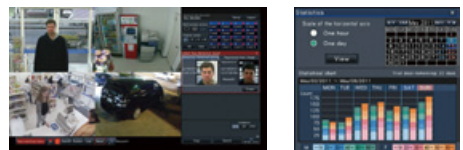

Easy Operation and Setup without PC

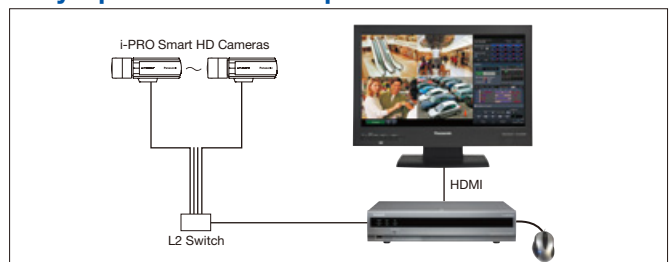

Specifications

TV System	NTSC
Supported Cameras	Panasonic i-PRO series Network cameras Onvif NVT conformant camera and encoder camera
Cameras	Supported Image Format: H.264, MPEG-4, MJPEG Supported Image Resolution: Aspect ratio [4:3]: SXVGA (1,280 x 960), SVGA (800 x 600), VGA (640 x 480), QVGA (320 x 240) Aspect ratio [16:9]: 1,920 x 1,080, 1,280 x 720, 640 x 360, 320 x 180* Depending on the camera Supported Audio Format: G.726 (ADPCM) 32 kbps Maximum Number of Cameras: 16
Recording	Recording Mode: Event, Schedule Pre-alarm Recording: Up to 15 seconds (Up to 10 seconds at 1,920 x 1080 resolution) Scheduled Recording Mode: 2 programs, 3 time zones/day, Independent setup for each day of the week Frame Rate/Camera: Up to 30 ips (Depending on the Camera)
Main Unit Functions	Camera Control: Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset, Auto Back Focus Multiscreen Mode: 4 / 16 split screen display, 3 / 4 / 6 / 9 / 12 / 16 split screen display on a full screen Playback Control: PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Goto Date, Goto Last (30 s) Search Mode: Search criteria: Time date, Playback by designating a timeline, VMD Copy: Recorded data of selected cameras and time date range can be copied to the SD (SDHC) card. Camera Title: Up to 14 characters Clock Display: Time: 12H/24H, Date: 5 formats Digital Zoom: Live: 2x, 4x, 8x (only for 1-screen or 4-screen) Play: 2x, 4x, 8x System Log: Operator access (100), Network error (100), Error (1,000), Event (750) System Setup: Setup page in English, French, Italian, Spanish, German, Russian, Japanese
Browser GUI	Camera Control: Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset Playback Control: REC, PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Goto Date, Goto Last (30 s) Search Mode: Search criteria: Time date, Event type, VMD, Camera number Display Mode: 1 / 4 screen Image Download: Recorded data of selected camera and time range can be downloaded to a PC. Viewer software can be downloaded separately. Copy: Recorded data of selected cameras and time date range can be copied to the SD (SDHC) card. Camera Title: Up to 14 characters Clock Display: On the browser. Time: 12H/24H, Date: 5 formats Digital Zoom: Live/Play: 2x, 4x (only for 1-screen) System Log: Operator access (100), Network error (100), Error (1,000), Event (750) GUI Language: English, French, Italian, Spanish, German, Russian, Japanese Supported OS and Browser Combination: Microsoft® Windows® 7 Professional 64 bit/32 bit & Windows® Internet Explorer® 8.0, Microsoft® Windows Vista® Business SP1 32 bit & Windows® Internet Explorer® 7.0 The language of OS must be the same as selected GUI language. Required PC: MJPEG/MPEG-4 H.264 CPU: Intel® Core™ 2 Duo 2.66 GHz or faster, RAM: 1 GB or more, VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later CPU: Intel® Core™ i7-920 or faster, RAM: 3 GB or more, VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later
Alarm/Event	Alarm Source: 9x Terminal inputs, 16x Camera alarms, Panasonic Alarm Protocol Face Matching: Off / On Event Mode: Off / On Alarm Action: Alarm recording, e-mail notification, Alarm message, Camera positioning, Terminal output, Panasonic alarm protocol output, Buzzer, Indicator Alarm Control: Reset Event Log: 750
Input / Output	Spot Output Connector: 1x 1 V [p-p] / 75 Ω (BNC) Monitor (HDMI) Connector: 1x HDMI Audio Output Connector: 1x -10 dBV, 600 Ω, Unbalanced (RCA) Alarm/Control Connector: Alarm: Alarm input 1 - 9 ¹ , Alarm output ² , Alarm reset input ¹ , Face matching output ² Control: Time adjustment input ¹ , +5 V output ³ Connector (25pin D-sub): Error/Warning: Network error output ² , HDD error output ² , Camera error output ² , Recorder error output ² , Recording error output ² Mouse Connection Port: 1x Network Port: 1x 10BASE-T / 100BASE-TX / 1000BASE-T (RJ-45) SDHC/SD Memory Card Slot: SDHC/SD memory cards applicable (miniSD cards and microSD cards not applicable)
Network	Maximum Bandwidth: Total 80 Mbps or less Supported Protocol: TCP/IP, UDP/IP, HTTP, FTP, SMTP, DNS, NTP, SNMP, RTP E-mail: Upon Alarm or Warning No. of Simultaneous Users: 4 or less User Registration: Up to 16 users User Level: 3 Levels (Programmable) Partitioning: User level - Camera (View & Control, No Access) Security Method: User authentication (ID and Password), Alteration detection
Other Functions	Time Synchronization: Terminal (Slave), NTP (Server/Client) Summer Time: User definable (using menu setup)
HDD	Type: WJ-NV200: 8.89 cm (3.5 inch) Serial ATA HDD, Up to 2x HDDs can be installed. WJ-NV200V: 8.89 cm (3.5 inch) Serial ATA HDD Up to 1x HDD can be installed.
DVD (WJ-NV200V only)	Supported DVD disk type: DVD-R, +R (Not supported: DVD-R DL, +R DL, DVD-R for authoring, 8 cm disks)
Viewer Software	Playback Control: Play, Rev Play, Pause, FF, FR, Prev Record, Next Record, Prev Image, Next Image Additional Functions: Alteration detection, Save as JPEG, Two times zoom, Print, Copy Supported OS, Language: Same as browser GUI, Language of the software will be English
General Specifications	Safety/EMC Standard: UL (UL60065), FCC (Part15 ClassA), C-UL (CAN/CSA C22.2 No.60065), DOC (ICES003 ClassA) Power Source: 120 V AC, 60 Hz Power Consumption: approx. 45 W

Trademarks and registered trademarks

- Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
- Axis is a registered trademark of Axis Communications AB.
- UniPhier is a registered trademark of Panasonic Corporation.
- "Super Dynamic", "SDII", "SDIII", "SDS", "SD5Link", "i-PRO" and "i-PRO SmartHD" logos are trademarks or registered trademarks of Panasonic Corporation.
- ONVIF and the ONVIF logo are trademarks of ONVIF Inc.


Important

- Safety Precaution: carefully read the operating instructions and installation manual before using this product.
- Panasonic can not be responsible for network performance and/or other manufacturer products that reside on the network.


TV System	NTSC
General Specifications	Ambient Operating Temperature: Main body: +5 °C ~ +45 °C (41 °F ~ 113 °F) Mouse (provided): +5 °C ~ +40 °C (41 °F ~ 104 °F) Ambient Operating Humidity: WJ-NV200 : 5 % ~ 90 % (without condensation) WJ-NV200V : 10 % ~ 80 % (without condensation) Maximum Operating Altitude: 2,000 m (6,562 feet) above sea level Dimensions: 420 mm (W) x 88 mm (H) x 300 mm (D) (16-17/32" (W) x 3-15/32" (H) x 11-13/16" (D)) (excluding rubber feet and projections) Mass (approx.): 4.8 kg (10.6 lbs.) without HDD 5.6 kg (12.36 lbs.) with 1 HDD 6.4 kg (14.13 lbs.) with 2 HDDs (WJ-NV200 only)

- *1: Non-voltage make contact input, 50 kΩ +5 V DC pull-up
- *2: Open collector output, 24 V DC, 100 mA max. *3: 200 mA max.

Part Names and Functions

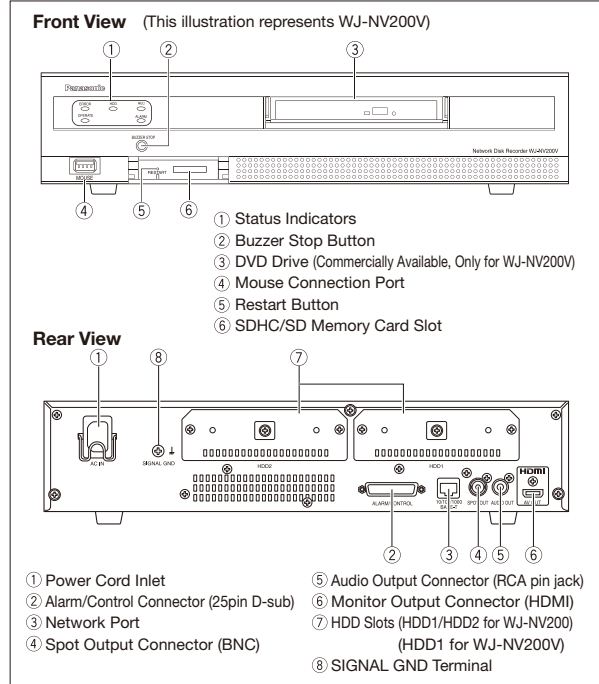

Appearance

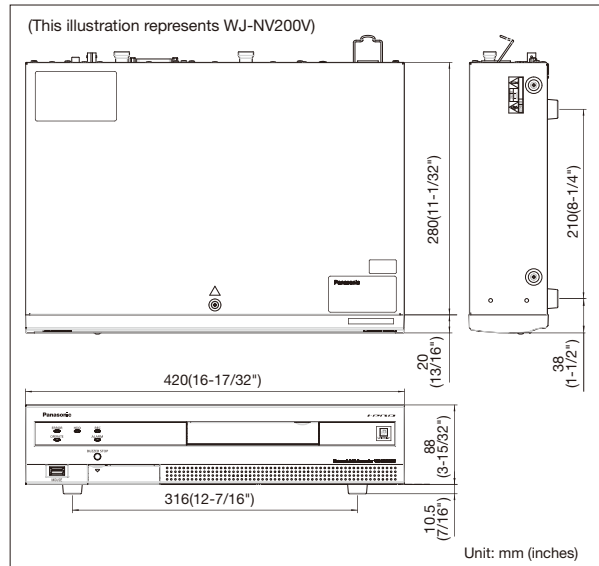

- All TV pictures are simulated.
- Masses and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.
- All product pictures are NTSC models.

DISTRIBUTED BY:

Panasonic®

<http://panasonic.net/security/>

<http://www.facebook.com/PanasonicNetworkCamera>

Printed in Japan (2A-064GL)