


MAX HD2 IP67

Dual 4G LTE Outdoor Mobile Router

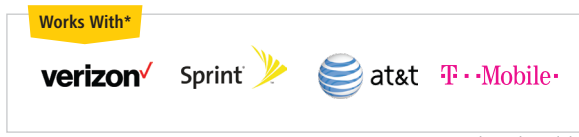

*Selected models

The HD2 IP67 offers dual embedded cellular modems and PoE support, all encased in a shock and vibration certified, waterproof enclosure that's more than a match for almost any environment.



Dual Cellular and Redundant SIM slots for Multiple Carrier.

The HD2 IP67 includes two built-in outdoor 4G LTE/3G modems and two Redundant SIM slots. It allows you to use the same or different cellular providers for bandwidth bonding or eliminating blind spots. List of supported 4G LTE carriers at: peplink.com/lte-networks/



SpeedFusion Bandwidth Bonding and Seamless Failover.

SpeedFusion bandwidth bonding technology bonds all connected bandwidth into a single superfast stream, using the same or different cellular providers.



Water-proof



Dust protected



Lightning Immunity



Shock and Vibration



Super-Duty IP67 Enclosure. Shock and Vibration Certified.

Its waterproof IP67 metal enclosure stands up to dust, vibration, and inclement weather. And, it is certified shock and vibration resistant, making it a great choice for construction, drilling, and other heavy-duty applications.

Optional PoE Input.

Cut down on cabling and simplify deployments. The HD2 IP67 supports 802.3af PoE input, so one wire is all you need for both connectivity and power. 802.af PoE Injector is available separately.

Specifications

MAX HD2 IP67	
WAN Interface	1x 10/100/1000M Ethernet Port 2x Embedded LTE Modems with Redundant SIM Slot
LAN Interface	1x 10/100/1000M Ethernet Ports
Router Throughput	100Mbps
Recommended Users	25-150
Cellular Antenna Connector	4x Female N-Type Cellular Antenna Connectors
Power Input	Power over Ethernet 802.3af* DC: 12V – 48V DC
Power Consumption	25W (max.)
Dimensions	9.0 x 12.2 x 2.6 inches 230 x 310 x 66 mm
Weight	5.84 pounds 2.65 kg
Operating Temperature	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS RF Port Lightning Immunity: ITU-T K.20 (+/- 1.5 kV) Shock and Vibration Resistance: EN 61373:1999 IEC 61373:1999
Warranty	1-Year Limited Warranty

*PoE Injector is available separately.



Ordering Information

	Product Code	Carrier/Region	Cellular Standard	4G Bands/Frequencies (MHz)	3G Bands/Frequencies (MHz)
LTE	MAX-HD2-M-LTE-US-IP67	Verizon/Sprint/ AT&T/T-Mobile	LTE	B2/1900, B4/AWS, B5/850, B13/700, B17/700, B25/1900	WCDMA/HSDPA/HSUPA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B4/AWS, B5/850, B8/900 EV-DO Rev.A: BC0/800, BC1/1900, BC10/800
	MAX-HD2-M-LTE-UE-IP67	Cellular 1: Verizon/Sprint/ AT&T/T-Mobile Cellular 2: Europe/International	LTE	Cellular 1 B2/1900, B4/AWS, B5/850, B13/700, B17/700, B25/1900 Cellular 2 B1/2100, B3/1800, B7/2600, B8/900, B20/800	Cellular 1 WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B4/AWS, B5/850, B8/900 EV-DO Rev.A: BC0/800, BC1/1900, BC10/800 Cellular 2 WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B5/850, B6/800, B8/900
	MAX-HD2-M-LTE-E-IP67	Europe/International	LTE	B1/2100, B3/1800, B7/2600, B8/900, B20/800	WCDMA/HSDPA/HSUPA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B5/850, B6/800, B8/900
LTEA	MAX-HD2-M-LTEA-W-IP67	Worldwide [^]	LTE Advanced	B1/2100, B2/1900, B3/1800, B4/AWS, B5/850, B7/2600, B8/900GSM, B12/700a, B13/700c, B20/800DD, B25/1900+, B26/850+, B29/700d, B30/2300WCS, B41/TD 2500	WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B3/1800, B4/AWS, B5/850, B8/900
	MAX-HD2-M-LTEA-P-IP67	Asia Pacific	LTE Advanced	B1/2100, B3/1800, B5/850, B7/2600, B8/900, B18/800 Lower, B19/800 Upper, B21/1500 Upper, B28/700 APT, B38/TD 2600, B39/TD 1900+, B40/TD 2300, B41/TD 2500	WCDMA/HSPA+/DC-HSPA+: B1/2100, B5/850, B8/900, B9/1800, B19/800 Upper UMTS: B6/800 TD-SCDMA: B39/1900

[^]Pending certification by Verizon and Sprint in the US

Add-on Feature

Product Code	Description
ACW-107	Includes 1x 802.3af/at PoE Injector