


VO6/24

Vertically Polarized Omnidirectional Antenna

Specifications

Type	omnidirectional antenna
Polarization	vertical
Frequency	2400-2485 MHz
Impedance	50 ohm
VSWR	≤1.5:1
Gain	6 dBi
Connector	N female
Power handling	20 W
Mount	mounting bracket fits 35-50 mm mast tubes
Diameter	23/32 mm
Length	330 mm excl mounting bracket
Weight	355 g net, 440 g shipping
Material	mount – aluminium, stainless steel radome - fibre glass
Color	white
Other	DC grounded

Smarteq reserves the right to change specifications without prior notice.

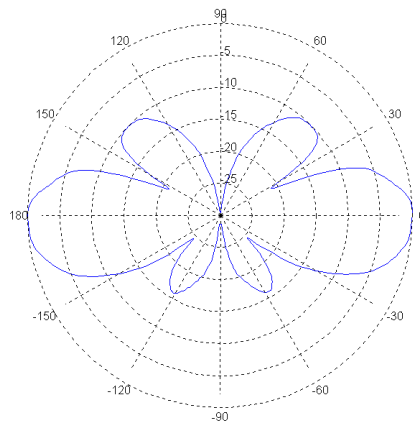

Elevation (E-field) radiation pattern

550046B

Smarteq develops and supplies high-quality antennas and antenna systems for the wireless transfer of speech and data, communication to and from vehicles and machine to machine. Our staff is fully focused on developing high-performance antennas that will continue to set new standards of excellence that will exceed our customers' expectations

SMARTEQ™
■■■■■ antennas

Smarteq Wireless AB

P.O. Box 4064 | SE-182 04 Enebyberg | Sweden

www.smarteq.com