

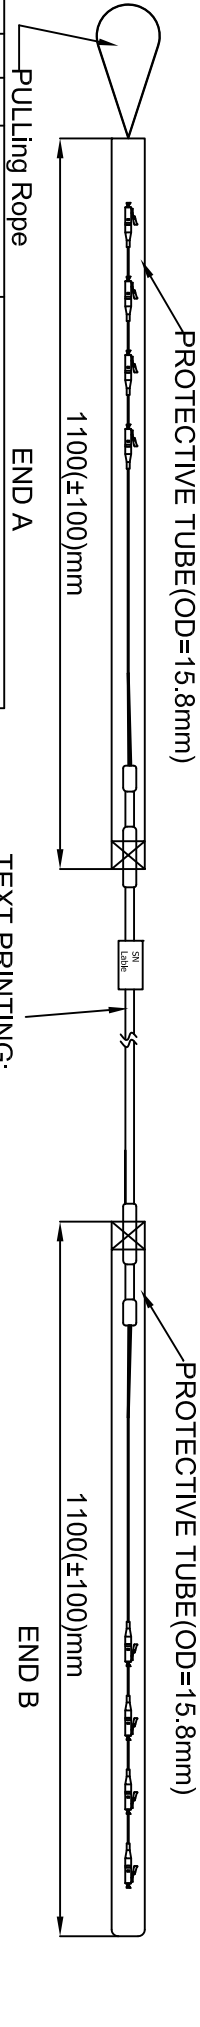


REV.	REVISION	DATE

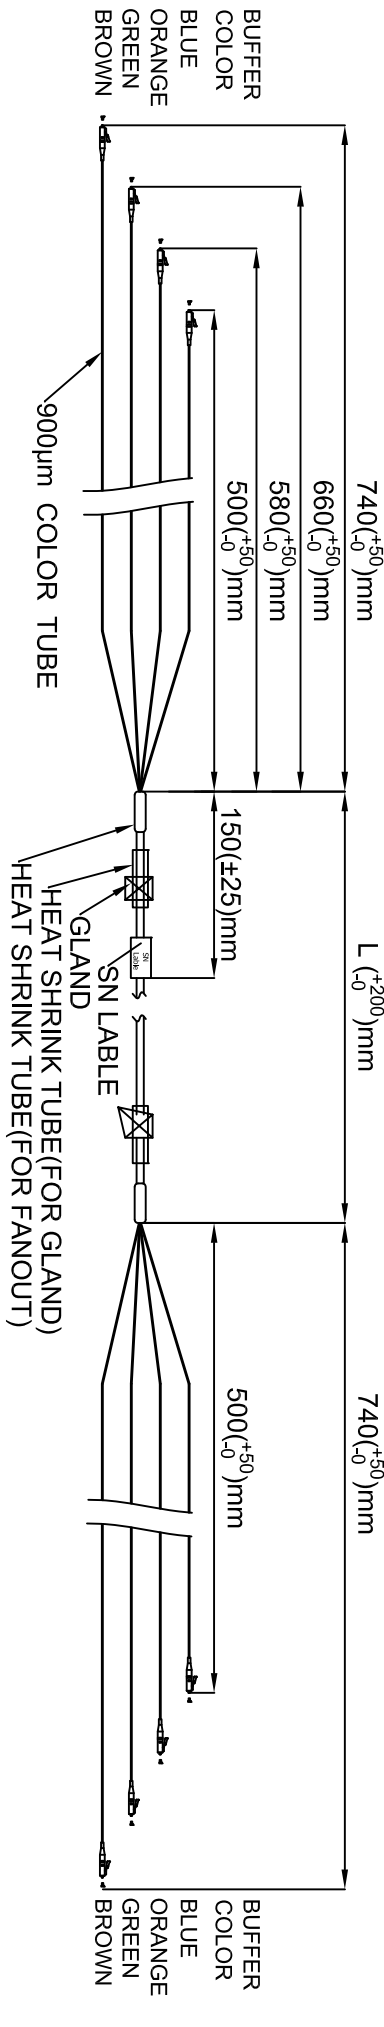

TEXT PRINTING:
 ACT Premium Multi mode Fiber Optic 4c Tight Buffer
 Cable 50/125um OM3 LSZH{batchcode}xxxxM




CABLE CONSTRUCTION

- OUTER JACKET:LSZH AQUA Φ4.0mm
- STRENGTH MEMBER
- COLORLED TIGHT BUFFER FIBER(900um)

ITEM	QTY	PART NO.	DESCRIPTION
RL2115	150	492.1(150000)	4XLC-4XLC 50/125 OM3 TB 150M
RL2114	140	459.3(140000)	4XLC-4XLC 50/125 OM3 TB 140M
RL2113	130	426.5(130000)	4XLC-4XLC 50/125 OM3 TB 130M
RL2112	120	393.7(120000)	4XLC-4XLC 50/125 OM3 TB 120M
RL2111	110	360.8(110000)	4XLC-4XLC 50/125 OM3 TB 110M
RL2110	100	328.1(100000)	4XLC-4XLC 50/125 OM3 TB 100M
RL2109	90	295.3(90000)	4XLC-4XLC 50/125 OM3 TB 90.0M
RL2108	80	262.5(80000)	4XLC-4XLC 50/125 OM3 TB 80.0M
RL2107	70	229.7(70000)	4XLC-4XLC 50/125 OM3 TB 70.0M
RL2106	60	196.9(60000)	4XLC-4XLC 50/125 OM3 TB 60.0M
RL2105	50	164.0(50000)	4XLC-4XLC 50/125 OM3 TB 50.0M
RL2104	40	131.2(40000)	4XLC-4XLC 50/125 OM3 TB 40.0M
RL2103	30	98.4(30000)	4XLC-4XLC 50/125 OM3 TB 30.0M
RL2102	20	65.6(20000)	4XLC-4XLC 50/125 OM3 TB 20.0M
RL2101	10	32.8(10000)	4XLC-4XLC 50/125 OM3 TB 10.0M
PART NO.	**	xx	L
ITEM	QTY	PART NO.	DESCRIPTION

Remark:
 1.Insertion Loss < 0.20dB
 Return Loss > 35dB
 2.3D of UPC
 Radius of Curvature:7~12mm
 Vertex Offset:0um~30um
 Fiber Height Spherical:-30nm~30nm

CUSTOMER APPROVAL:		DATE:
		
DRAWN BY Vernon CHECKED BY Wale APPROVED BY David SALE BY	UNIT: Inches[mm] DATE 2015/12/21 DATE 2015/12/21 DATE 2015/12/21 DATE 2015/12/21	TITLE: LC - LC 50/125 OM3 LSZH AQUA CUSTOMER PART NO. RL21** CUSTOMER PART NO. Ref. NO. REV. B
TRENDX PART NO.		