



- Pre-installed ViewBoard® Cast and Zoom
- USB multimedia player
- Supports HDMI CEC pass-through
- Flicker-free and Blue Light Filter eye-care technologies
- HDMI, VGA, RS232, RJ45 input compatibility

The ViewSonic® CDE7500 is a 75" 4K Ultra HD display with conferencing capabilities. With features including a razor sharp resolution of 3840 x 2160, ultra wide viewing angles, 2 x 20W speakers, and file sharing software, the display has been designed with the meeting room scenario in mind. The pre-installed ViewBoard® Cast content sharing and Zoom conference software enables multiple users, whether on-site or on-line, to participate in conferences and share content with each other simultaneously, transforming CDE7500 into a dynamic content hub. This display's integrated quad-core processor and 16GB internal memory allows users to play multimedia content from a USB without the need for a PC, while the HDMI and VGA inputs offer connection with a variety of high definition devices. Flicker-free and Blue Light Filter eye-care technologies provide viewing that is comfortable for the human eye, from start to finish.

## 4K Ultra HD Resolution

With four-times the resolution of Full HD, this Ultra HD 3840 x 2160 display delivers a breathtaking viewing


experience with immersive images that are vibrant, clear, and as large as life.



## Integrated USB Multimedia Player

This display features an integrated media player with a convenient USB playback function. Now photos, music, and 1080p video can be quickly displayed on-screen directly from a USB drive – without the need for a PC.




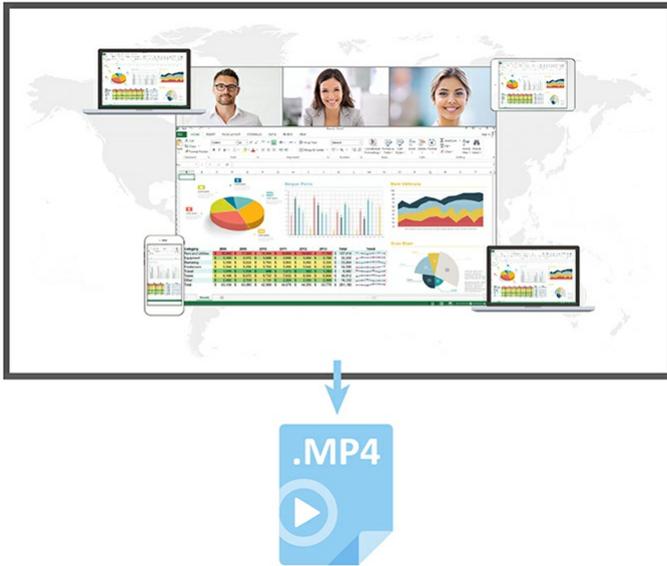

---

## Powerful Dual Speakers for Crystal-clear sound

Its 40W speaker design delivers incredible sound while combining eye-catching multimedia content with high-quality sound effects—creating a lasting audio-visual impression on your audience.

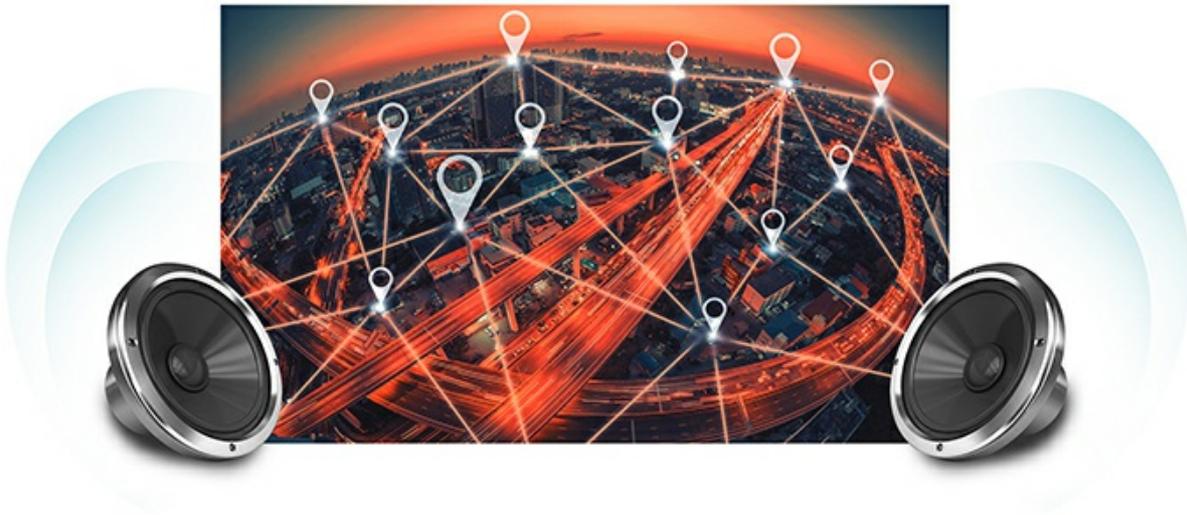

---

## HDMI CEC Opens A World of HDMI Possibilities



With HDMI CEC functionality, remote controller signals can be transmitted via HDMI cable to connected HDMI devices. This enables out-of-sight DVD players, sound systems, and other devices to be directly controlled with the display's remote controller for a wider range of viewing possibilities.



---

## Eye-care technologies for comfort viewing

This display adopts exclusive Flicker-Free and Blue Light Filter eye-care technologies. By nearly eliminating screen flickering at all brightness levels via a constant LED light source and reduced blue light exposure, the display ensures longer viewing time and increased eye comfort for presentation and multimedia experiences – without eye fatigue.

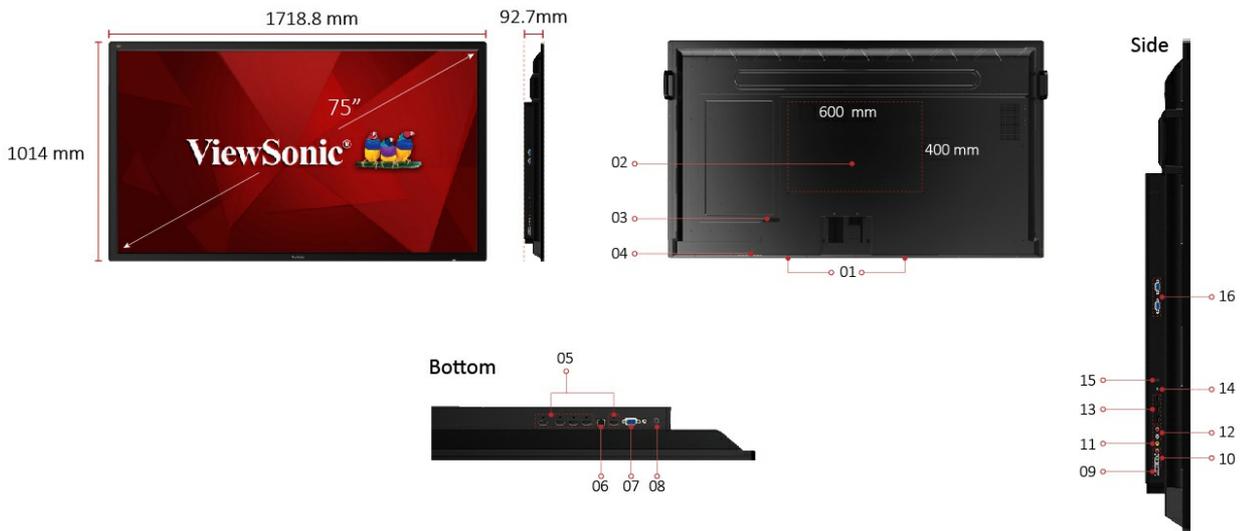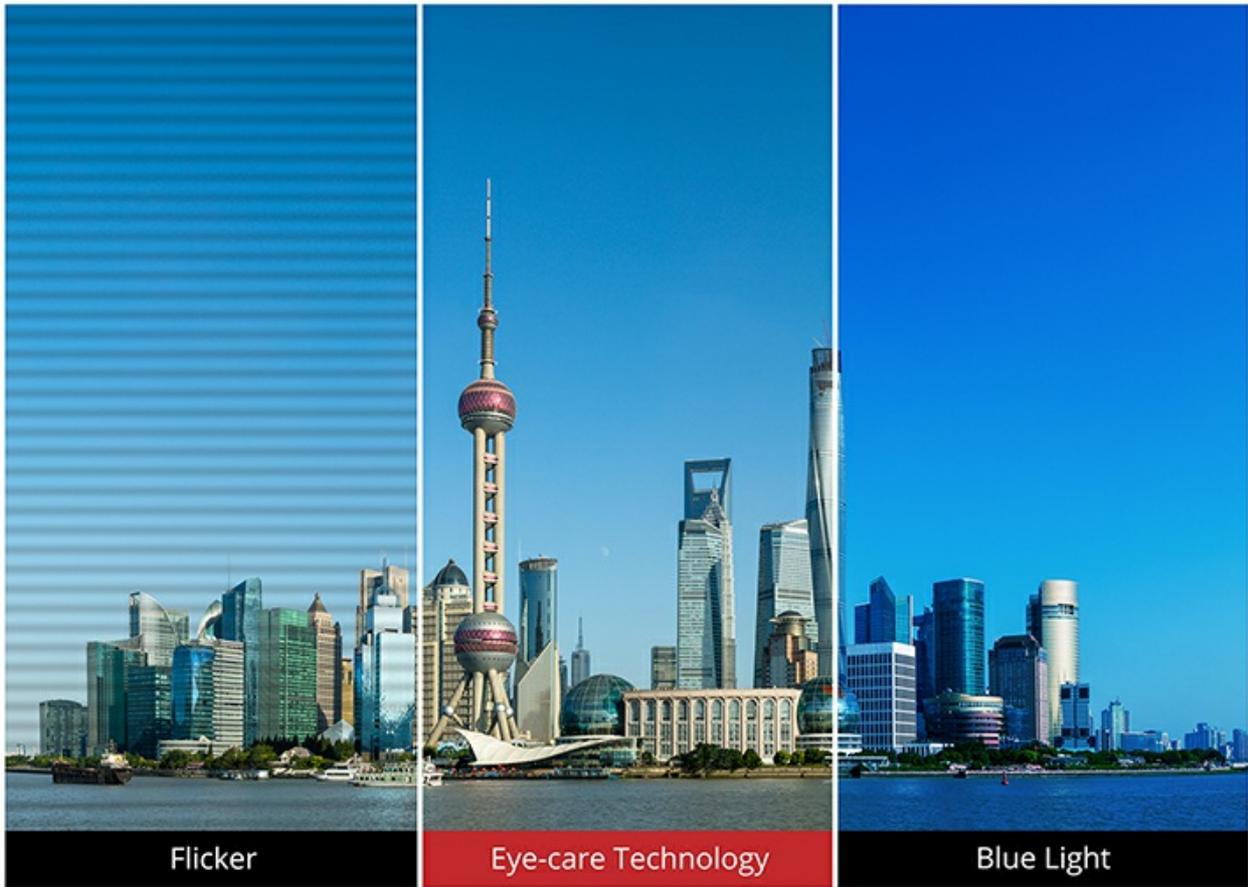

1. Internal Speakers
2. VESA Compatible® Wall Mount 600 x 400 mm
3. AC In
4. Menu Controls
5. HDMI ports
6. LAN ports
7. VGA port

8. VGA-AUDIO
9. AV-OUT
10. YPbPr/YCbCr IN ports
11. AV-IN ports
12. AUDIO-IN port
13. USB ports
14. Headset port
15. SPDIF port
16. RS232 IN/OUT port

## Technical Specifications

---

<b>LCD PANEL</b>	Panel Size	75"
	Type/ Tech	TFT LCD Module with LED Backlight
	Display Area (mm)	1649.66(H) x 927.94(V)
	Aspect Ratio	16:09
	Resolution	3840 x 2160
	Colors	1.07B colors (10bit)
	Brightness	350 nits (typ.) 300 nits (min.)
	Contrast Ratio	1200:1 (typ.)
	Response Time	8 ms
	Viewing Angles	H = 178, V = 178 (typ.)
	Backlight	DLED
	Backlight Life	30,000 Hours Min.
	Hardness	7H
<b>INPUT</b>	HDMI	x 4
	RGB / VGA	x 1
	Audio	x 1
	CVBS (AV)	x 1
	YPbPr	x 1
	RS232	x 1
	PC Slot	x 1 PC Slot
<b>OUTPUT</b>	HDMI	x 1 (for one of HDMI1/2/3)
	Audio (Earphone out)	x 1
	SPIDF	x 1
	RS232	x 1
<b>LAN</b>	RJ45	x 1
<b>USB</b>	2.0 Type A	x 2 (side x1, top x1)
	3.0 Type A	x 2 (side)
<b>SPEAKERS</b>		20W x 2
<b>BUILT-IN PC</b>	Processor	ARM Cortex A53 Quad Core 1.5G Hz CPU
	Memory	2GB
	Storage	16GB
<b>COMPATIBILITY</b>	VGA	Refer to timing table

	HDMI	480i, 480p, 720p, 1080p, up to 2160p
	CVBS	480i
<b>POWER</b>	Voltage	100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz
	Consumption	300 W
<b>ERGONOMICS</b>	Wall Mount (VESA®)	600 x 400mm; Screw: M8 x 20mm
<b>OPERATING CONDITIONS</b>	Temperature (° C)	32°F to 104°F (0°C to 40°C)
	Humidity	10% ~ 90% non-condensing
<b>DIMENSIONS</b>	Physical w/o Stand (mm / inch)	1735.4 x 1014.0 x 93.2 mm / 68.32 x 39.92 x 3.67 inch
	Packaging (mm / inch)	1990 x 1165 x 320 mm / 78.35 x 51.77 x 13.78 in
<b>WEIGHT</b>	Net (kg / lb)	kg / lbs
	Net w/o Stand (kg / lb)	43.05 kg / 94.91lbs
	Gross (kg / lb)	65.40 kg / 144.18lbs
<b>REGULATIONS</b>	Standard	cTUVus, FCC, MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, CCC, China Energy Label

## ViewSonic® Limited Warranty

ViewSonic provides customers with the security of a manufacturer's warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at [www.viewsoniceurope.com](http://www.viewsoniceurope.com)

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.