


REV.	REVISION	DATE

SC/PC SM CONNECTOR L±2"(L±50)

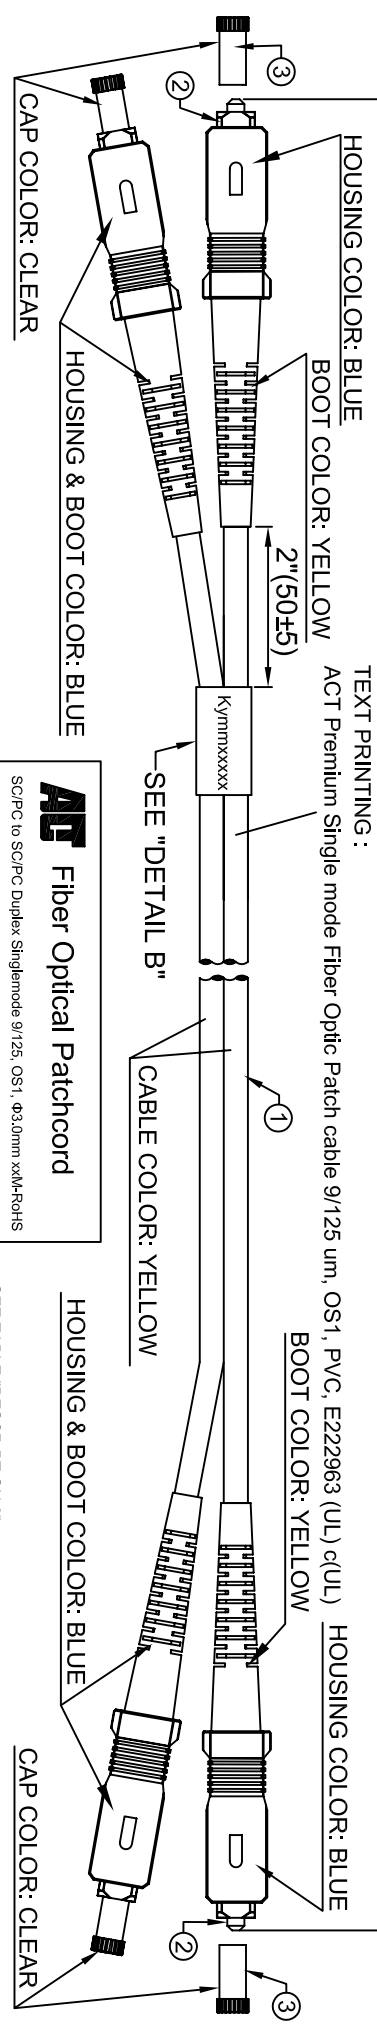

TEXT PRINTING :  
ACT Premium Single mode Fiber Optic Patch cable 9/125 um, OS1, PVC, E222963 (UL) c(UL)

NOTE:  
1. OPERATION LOSS < 0.3dB.  
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.  
3. DURABILITY: 500 CYCLES.  
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.  
5. TENSILE STRENGTH: 10Kg.  
6. PACKING:

**ATF** Fiber Optical Patchcord

SC/PC to SC/PC Duplex Singlemode 9/125, OS1, ø3.0mm xx(L)-RohS  
Model: xxxxx -xxxxx  
Lot number: \_\_\_\_\_

Performance: (@23°C) λ=850/1310±20nm  
Insertion Loss ≤ 0.3dB  
850nm 1310nm

Serial No	A	B	C	D
Kymmxxxxx				

Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_



PO/NO: \_\_\_\_\_

SEE TABLE "DESCRIPTION 1"

SEE TABLE "DESCRIPTION 2"

ROUND CABLE METHOD SEE "DETAIL A"	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

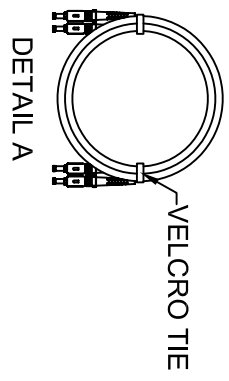

DETAIL B  
Y: Year, mm: Month  
xxxxx: Serial Number

DETAIL C

PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2
RL3950	50	50	164'(50000)	441250-RL3950	8716065223972
RL3920	20	20	65.6'(20000)	441220-RL3920	8716065223965
RL3915	15	15	49.2'(15000)	441215-RL3915	8716065223958
RL3910	10	10	32.8'(10000)	441210-RL3910	8716065223941
RL3905	05	5	16.4'(5000)	441205-RL3905	8716065223934
RL3903	03	3	9.84'(3000)	441203-RL3903	8716065223927
RL3902	02	2	6.56'(2000)	441202-RL3902	8716065223910
RL3951	51	1.5	4.92'(1500)	4412015-RL3951	8716065223903
RL3901	01	1	3.28'(1000)	441201-RL3901	8716065223897



CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

DRAWN By	Catherine	UNIT:	Inches[mm]
CHECKED By		DATE	2007/10/4

TITLE: PATCHCORD SC-SC SINGLEMODE  
DUPLICATE 9/125, OS1, 3.0mm, YELLOW.

APPROVED BY		DATE		DRAWING NO.	PK709008	CUSTOMER PART NO.		Ref. NO.		REV.	
-------------	--	------	--	-------------	----------	-------------------	--	----------	--	------	--

SALE BY		DATE		TRENDX PART NO.	
---------	--	------	--	-----------------	--

ITEM	Q'TY	PART NO.	DESCRIPTION
3	4PCS		SC DUST COVER, CLEAR.
2	4SETS		CONNECTOR, SC/PC SM, BLUE HOUSING WITH YELLOW & BLUE BOOT.
1	1PC		CABLE: SINGLEMODE, 9/125um, 3.0mm ZIPCARD, OFNR, YELLOW JACKET.

PART LIST